

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets


(11) Publication number : **0 618 723 A1**

(12)

EUROPEAN PATENT APPLICATION(21) Application number : **94302331.7**(22) Date of filing : **31.03.94**(51) Int. Cl.⁵ : **H04N 5/91, H04N 5/92,
G11B 20/00**(30) Priority : **02.04.93 JP 77044/93
27.08.93 JP 213206/93**(43) Date of publication of application :
05.10.94 Bulletin 94/40(84) Designated Contracting States :
DE FR GB NL(71) Applicant : **SONY CORPORATION
7-35 Kitashinagawa 6-chome
Shinagawa-ku
Tokyo 141 (JP)**(72) Inventor : **Kanota, Keiji, c/o Intellectual
Property Div.
Sony Corporation,
6-7-35 Kitashinagawa
Shinagawa-ku, Tokyo 141 (JP)**Inventor : **Ezaki, Tadashi, c/o Intellectual
Property Div.****Sony Corporation,
6-7-35 Kitashinagawa
Shinagawa-ku, Tokyo 141 (JP)**Inventor : **Kori, Teruhiko, c/o Intellectual
Property Div.****Sony Corporation,
6-7-35 Kitashinagawa
Shinagawa-ku, Tokyo 141 (JP)**Inventor : **Tsuchiya, Satoshi, c/o Intellectual
Property Div.****Sony Corporation,
6-7-35 Kitashinagawa
Shinagawa-ku, Tokyo 141 (JP)**(74) Representative : **Turner, James Arthur et al
D. Young & Co.,
21 New Fetter Lane
London EC4A 1DA (GB)**

(54) Copy control for a video signal.

(57) A video signal is processed to selectively permit copying by superposing in that portion of the video signal which does not contain useful picture information a copyright information signal indicative of whether the viewable picture that is displayed from the video signal is subject to copyright and a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal.

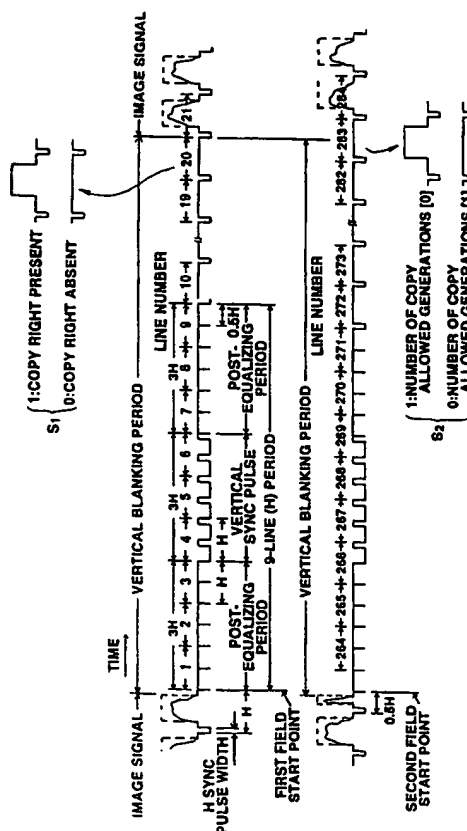**FIG.1****EP 0 618 723 A1**

This invention relates to copy protection of a video signal.

Various techniques and formats have been proposed to prevent video signals from being copied, or dubbed, without authorization. For example, it is preferable in many environments to permit a video signal to be displayed as a video picture on, for example, a television monitor, but to prevent that same video signal from being recorded by a video recorder. The video signal may be transmitted via cable, direct satellite broadcast (DSB) or over-the-air, or the video signal may be recorded on a video tape or a video disk. In the field of sales or rentals of video tapes and video disks, substantial amounts of revenues will be lost if a user is permitted to make a copy of the video program on a video tape or disk, thereby depriving the originator or distributor of the video tape or video disk of additional sales or rentals. Even though the unlawful re-recording or dubbing of such video programs may constitute copyright infringement, the threat of prosecution therefor presents little if any deterrent to such unlawful copying. Consequently, more positive approaches have been adopted to prevent a user from making an unauthorized copy of a video program in the form of a video recording thereof.

In one anti-copying scheme the video signal is modified to defeat the satisfactory operation of a typical video recorder yet still permit the display of an acceptable video picture therefrom. This is achieved by reducing the number of vertical synchronizing pulses included in the vertical blanking interval, thereby defeating the servo locking operation of the typical video recorder but permitting adequate detection of the vertical synchronizing pulses in the usual television receiver sync detector. In another proposal high amplitude pulses are inserted into a normally blank line interval of the vertical blanking interval so as to cause the usual automatic gain control (AGC) circuitry in a typical video recorder to reduce the recording level of the signal recorded thereby, resulting in a recorded video signal whose amplitude is effectively zero.

As yet another example, it has been proposed to superpose a copy inhibit pulse on, for example, the equalizing or vertical synchronizing pulses normally included in the vertical blanking interval and to include in the recording channel of a video recorder a detector which operates to inhibit the recorder from operating in a record mode upon detecting this inhibit pulse.

While there is merit to each of the foregoing proposals, none of them addresses the problem of permitting one copy of the video signal from being made but prohibiting the copy from being copied further. In many situations it may be desirable to permit a consumer to make one copy directly from a video signal (whether that video signal is broadcast or reproduced from a video tape or video disk) but the number of successive generations of copies is to be controlled. For example, a first generation may be permitted but a second generation may be prohibited. As another example, first and second generations may be permitted but a third generation may not (i.e. a recording and a re-recording may be permitted but a re-re-recording may be prohibited). In the foregoing copy protection schemes, if a video signal is permitted to be copied, a copy of the copied signal may be made and successive generations likewise may be made. But if a video signal is prohibited from being copied, even a single generation copy cannot be made. That is, prior proposals have not considered what is referred to herein as a serial copy management system (SCMS).

Respective aspects of the invention are set forth in claims 1, 2, 3, 4, 7, 9, 11, 12, 13, 16 and 19.

In accordance with this invention, a video signal is processed to selectively permit copying thereof by superposing on that portion of the video signal which does not contain useful picture information a copyright information signal indicative of whether the viewable picture that is produced from the video signal is subject to copyright and a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal.

In one embodiment, the copyright information and copy generation signals are superposed in respectively different line intervals of the video signal. In another embodiment, the copyright information and copy generation signals are superposed in the same line interval. In a further embodiment, the copyright information signal is superposed in a line interval of one field of a video frame and the copy generation signal is superposed in a line interval of the other field of that frame. In a still further embodiment, the copyright information and copy generation signals are superposed in different line intervals in the same field. Preferably, the copyright information and copy generation signals are superposed in the vertical blanking interval of the video signal.

Preferably, the video signal having the copyright information and copy generation signals superposed thereon is recorded on a record medium.

Preferably, a video recorder that is supplied with the video signal having the copyright information and copy generation signals superposed thereon is selectively inhibited depending upon the information conveyed by the superposed signals. In one embodiment, if re-recording of the video signal is permitted, the copy information signal that is recorded with the video signal is modified to indicate a decremented number of successive generations of copies that can be made from the recorded video signal. For example, the copy generation signal may be a plural-bit signal indicative of a count, and this count is decremented when the video signal is recorded (or dubbed). Consequently, the number of successive re-recordings may be regulated.

Preferably, a video signal reproducing channel is provided with a detector for detecting copy protection

information that is contained in the reproduced video signal, thereby superposing on that portion of the video signal which does not contain useful picture information the aforementioned copyright information and copy generation signals. Hence, re-recording of the reproduced video signal and successive generations of re-recordings are selectively enabled/inhibited.

5 Preferably, and notwithstanding the superposed copyright information and copy generation signals, the video signal nevertheless may be readily displayed.

At least preferred embodiments of the invention provide a technique for superposing on that portion of the video signal which does not contain useful picture information copy protection information which includes information representing the number of successive generations of copies that can be made from the video signal.

10 Accordingly, at least preferred embodiments of the invention provide an improved technique for controlling the copying of a video signal; video signal copy control by which the number of successive generations of copies that can be made from an input video signal is regulated; a serial copy management system for a video signal, thereby permitting, for example, a copy of an input video signal to be made but a copy of the copy (that is a re-recording of the copy) to be prohibited; recording circuitry that detects the aforementioned copyright information and copy generation signals to selectively enable or inhibit recording of the video signal; a copy generation signal detector which selectively decrements the number of successive generations of copies indicated by the copy generation signal; and circuitry included in the playback channel of a video recorder which detects copy protection information contained in the reproduced video signal and which superposes on the reproduced video signal a copyright information signal and a copy generation signal so as to selectively control re-recording of the reproduced video signal.

The invention will now be described by way of example with reference to the accompanying drawings, throughout which like parts are referred to by like references, and in which:

Figure 1 is a waveform diagram of relevant portions of two fields of a frame of a National Television Standards Committee (NTSC) video signal containing copyright information and copy generation signals;

25 Figures 2 and 3 are waveform diagrams illustrating the superposed copyright information and copy generation signals, respectively;

Figure 4 is a waveform diagram illustrating the superposition of copyright information and copy generation signals as part of identifying data included in a vertical blanking interval (VBID);

Figures 5 and 6 are waveform diagrams of the VBID signals shown in greater detail;

30 Figure 7 is a waveform diagram of two fields of an NTSC signal wherein the copyright information and copy generation signals are recorded in the same line interval in each field;

Figure 8 is a waveform diagram illustrating in greater detail the recording in the same line interval of the copyright information and copy generation signals;

35 Figure 9 is a waveform diagram illustrating the incorporation of the copyright information and copy generation signals in VBID data in each field;

Figure 10 is a waveform diagram showing in greater detail the copyright information and copy generation signals as part of the VBID data;

Figures 11 and 12 are waveform diagrams of modifications of the waveform diagram shown in Figure 10;

40 Figure 13 is a waveform diagram of two fields of a video signal in which the copyright information and copy generation signals are recorded in different line intervals in each field;

Figure 14 is a waveform diagram showing in greater detail the recording in different line intervals of the copyright information and copy generation signals;

Figure 15 is a waveform diagram of two fields of a video signal in which the copyright information and copy generation signals are included in VBID data disposed in two line intervals of each field;

45 Figure 16 is a waveform diagram showing in greater detail the VBID data in the two line intervals and including the copyright information and copy generation signals;

Figure 17 is a waveform diagram of VBID data that may be used in high definition television signals and which includes the copyright information and copy generation signals;

50 Figures 18-20 are block diagrams which are useful in understanding the manner in which the embodiment effects copy protection;

Figure 21 is a block diagram of circuitry which may be included in the recording channel of a video recorder;

Figure 22 is a flow chart representing the routine carried out by control unit 15 of Figure 21;

Figure 23 is a block diagram of circuitry which may be provided in a video signal reproducing channel;

Figure 24 is a flow chart of the routine carried out by control unit 26 of Figure 23;

55 Figure 25 is a waveform diagram of two fields of a video signal which contain a copyright information signal and a plural-bit copy generation signal;

Figure 26 is a waveform diagram showing in greater detail VBID data containing the copyright information signal and plural-bit copy generation signal; and

Figures 27-31 are block diagrams which are useful in understanding the manner in which copying is selectively controlled.

Referring to Figure 1, there is illustrated a portion of each of two fields of a frame of video signals in accordance with the NTSC standard. It is appreciated that each field is divided into an effective picture portion which contains useful picture information, such as line intervals 21, 22, etc. in the first field and line intervals 284, 285, etc. in the second field. Each field interval also includes a non-picture portion which is shown as the vertical blanking period and includes line intervals 1, 2, ...19, 20 in the first field and line intervals 264, 265, ...282, 283 in the second field. It is recognized that the twentieth line in the first field, i.e. line 20, normally is "blank" and the twentieth line of the second field, i.e. line 283, also normally is blank. In the embodiment illustrated in Figure 1, a copyright information signal S_1 is superposed in line 20 of the first field and a copy generation signal S_2 is superposed in line 283 of the second field. That is, the twentieth line interval in each field has superposed therein the copyright information and copy generation signals S_1 and S_2 , respectively. This is shown in greater detail in Figures 2 and 3.

In accordance with one embodiment, the copyright information signal S_1 is a single bit and when the viewable picture which is reproduced from the video signal is subject to copyright, $S_1 = 1$. If the viewable picture is not subject to copyright, $S_1 = 0$.

In the embodiment described herein, the copy generation signal S_2 also is formed as a single bit signal. When $S_2 = 0$, a single generation of the video signal may be recorded; but when $S_2 = 1$, no generations of the video signal may be made. More particularly, the video signal cannot be recorded if $S_1 = 1$ and $S_2 = 1$. Although the copy generation signal shown in Figures 1-3 indicates whether one generation or zero generations of the video signal may be made, in other embodiments described below the copy generation signal S_2 is a plural-bit signal indicative of a count identifying the number of generations of copies that may be made of the video signal. However, for simplification, it is assumed herein that the copy generation signal S_2 simply is a single bit signal.

As can be seen from Figures 1-3, the copyright information and copy generation signals are recorded in different line intervals in different fields. As will be described, these signals may be recorded in the same line interval in each field or in different line intervals in each field.

Figures 4-6 represent an embodiment similar to that shown in Figures 1-3, except that in Figures 4-6 copyright information signal S_1 and copy generation signal S_2 are simply respective ones of several bits representing other data, this data being referred to as vertical blanking interval data (VBID). Here, the VBID data superposed in line 20 of the first field contains the copyright information signal S_1 and the VBID data superposed in line 283 of the second field contains copy generation signal S_2 . As before, S_1 and S_2 are shown simply as single bit signals.

It will be appreciated that the copyright information and copy generation signals S_1 and S_2 recorded in lines 20 and 283, respectively, may be readily detected simply by sensing the vertical synchronizing pulses and then counting a suitable number of line intervals thereafter, thus detecting the twentieth line interval in each field. Those of ordinary skill in the art are sufficiently familiar with suitable detecting arrangements by which the twentieth line interval and, thus, the copyright information and copy generation signals may be detected.

Figure 7 is similar to Figure 1, except that in the embodiment shown in Figure 7, copyright information signal S_1 and copy generation signal S_2 are recorded in the same line interval. It is seen that the copyright information and copy generation signals are recorded in the twentieth line interval of each field of a frame, namely line 20 of the first field and line 283 of the second field. As shown in Figure 8, copyright information signal S_1 is illustrated as a single bit and copy generation signal S_2 likewise is illustrated as a single bit. As before, $S_1 = 1$ indicates that the picture reproduced from the video signal is subject to copyright; $S_2 = 0$ indicates that at least one generation of copies may be made of the video signal and $S_2 = 1$ indicates that no generations of copies may be made from the video signal. Hence, in the example being described, the video signal cannot be recorded when $S_1 = 1$ and $S_2 = 1$.

Figure 9 is similar to Figure 4, except that in the embodiment shown in Figure 9, the copyright information signal S_1 and the copy generation signal S_2 both are included in the same VBID code contained in the twentieth line interval of each field. Hence, the VBID code containing the copyright information and copy generation signals S_1 and S_2 is disposed in line 20 of the first field and in line 283 of the second field. Figure 10 shows in greater detail the format of the VBID code containing the copyright information and copy generation signals.

It will be seen that the VBID code shown in Figure 10 is comprised of a reference bit used, for example, for synchronization purposes, followed by fourteen bits of data and six bits of an error check code (such as cyclical redundancy check code). The fourteen data bits represent aspect ratio information (e.g. aspect ratios of 16:9 or 4:3), header information which identifies the type of data that is represented by the next-following data bits, and then 8-bit data. It is seen that the first two bits of this 8-bit data represent copyright information and copy generation data and the remaining six bits may be used to convey other information, such as whether

the video picture is a three-dimensional (3D) picture, whether title information is being transmitted, etc. The information conveyed by the VBID code, other than the copyright information and copy generation signals are not particularly relevant to the present embodiment; and in the interest of brevity, further description of the VBID code is not provided herein.

Figures 11 and 12 are other examples of VBID formats and illustrate the versatility of the VBID code and the flexibility thereof, namely that the copyright information and copy generation signals may be included at any desired locations of the VBID code, regardless of the particular format of such code. For example, the header information shown in Figure 10 may be omitted, as represented by Figures 11 and 12; and the reference bit shown in Figure 10 likewise may be omitted as represented by Figure 12. Nevertheless, since the VBID code is included in a particular line interval of a field, the VBID code may be readily detected; and the presence therein of the copyright information and copy generation signals may be detected. Consequently, a determination of whether the video signal may be copied is made as a function of the values of S_1 and S_2 , as discussed above.

Figure 13 is similar to Figure 1, except that copyright information signal S_1 and copy generation signal S_2 are included in different line intervals in the same field. More particularly, and as an example, copyright information signal S_1 is located in the nineteenth line interval in each field and copy generation signal S_2 is located in the twentieth line interval in each field. Hence, copyright information and copy generation signals S_1 and S_2 are superposed in lines 19 and 20 of the first field and lines 282 and 283 of the second field. As shown in Figure 14, the copyright information signal S_1 is represented as a single bit signal and, similarly, the copy generation signal S_2 also is represented as a single bit signal. Although the copyright information signal is shown to precede the copy generation signal, it will be readily apparent that, if desired, this sequence may be reversed.

Figures 15 and 16 represent an embodiment similar to that shown in Figures 13 and 14, except that in Figures 15 and 16 copyright information signal S_1 and copy generation signal S_2 are included in the VBID data. In the illustrated embodiment, the VBID data which includes copy information signal S_1 is superposed in line 19 of the first field and in line 282 of the second field; and the VBID data containing copy generation signal S_2 is superposed in line 20 of the first field and in line 283 of the second field. It is appreciated that in the embodiments of Figures 13-14 and Figures 15-16, each field of each frame contains both copyright information signal S_1 and copy generation signal S_2 .

In the examples discussed above, the copyright information and copy generation signals are superposed in specific lines of the respective fields of the video signal. In particular, lines 19 and 20 of the first field and lines 282 and 283 of the second field are representative of those lines in which these signals are superposed. It will be appreciated, however, that the copyright information and copy generation signals may be superposed in any desired lines in that portion of the video signal which does not contain useful picture information. Moreover, the superposition of the copyright information and copy generation signals in the so-called non-picture portion of the video signal is applicable to various different types of broadcast standards. For example, the copyright information and copy generation signals may be superposed in the non-picture portion of an NTSC signal, a phase alternating line PAL signal or a high definition (HD) signal. In the latter, the copyright information and copy generation signals may be superposed in the thirty-second line interval of each field of an HD frame, such as line 32 of the first field and line 595 of the second field. Figure 17 schematically illustrates VBID data which contain the copyright information and copy generation signals S_1 and S_2 that may be superposed in the thirty-second line interval of each HD field.

The examples discussed above have described the copyright information and copy generation signals as respective single bit signals. The following table summarizes the conditions, or states, of these signals and indicates whether the video signal in which such copyright information and copy generation signals are superposed may be recorded, or dubbed. It will be appreciated that the expression "copy permitted" indicates that at least one generation of the video signal may be recorded; and the expression "copy inhibited" indicates that no generations of the video signal may be recorded:

TABLE 1

| Copyright Info. S_1 | Copy Generation S_2 | Recordable Generations |
|-----------------------|-----------------------|------------------------|
| 0 | 0 | Copy Permitted |
| 0 | 1 | Copy Permitted |
| 1 | 0 | Copy Permitted |
| 1 | 1 | Copy Inhibited |

In the foregoing Table, $S_1 = 1$ indicates that the video picture that may be displayed from the video signal is subject to copyright and $S_1 = 0$ indicates that the video picture is not subject to copyright. In addition, $S_2 = 0$ indicates that at least one generation of the video signal may be recorded; and $S_2 = 1$ indicates that no generations of the video signal may be recorded. Hence, a video signal on which is superposed copyright information and copy generation signals $S_1 = 1$ and $S_2 = 1$ is inhibited from being recorded.

Three typical examples of serial copy management that may be achieved by the single bit copyright information and copy generation signals are represented by the block diagrams of Figures 18-20. In Figure 18, it is assumed that a video signal on which the copyright information and copy generation signals S_1 and S_2 are superposed is received by a television tuner 1. It will be appreciated that this video signal may be broadcasted or may be supplied as video signals reproduced from a video disk or from a video tape. In any event, in the example represented by Figure 18, it is assumed that the video signal is not subject to copyright and, therefore, $S_1 = 0$.

Consequently, and with reference to copy protection, it is of no moment if copy generation signal $S_2 = 0$ or $S_2 = 1$. That is, the video signal which is supplied by tuner 1 to, for example, a video recorder 2 may be recorded by the video recorder. As represented, the superposed copyright information and copy generation signals which are recorded with the video signal by video recorder 2 admit of their same states as are preset in the video signal supplied to the video recorder. Hence, the copyright information and copy generation signals S_1 and S_2 which are superposed on the video signal recorded by video recorder 2 and which subsequently are reproduced by the video recorder are represented as $S_1 = 0$ and $S_2 = 0$ or 1.

When the video signal having the superposed copyright information and copy generation signals is reproduced from video recorder 2 and supplied for re-recording by video recorder 3, this re-recording is permitted because the reproduced, superposed copyright information signal $S_1 = 0$. As before, if $S_1 = 0$, it does not matter if $S_2 = 0$ or $S_2 = 1$. Thus, video recorder 3 is permitted to record the video signal reproduced from video recorder 2 on which the illustrated copyright information and copy generation signals are superposed. Thus, a first generation of the video signal may be recorded by video recorder 2 and a second generation of the video signal may be recorded by video recorder 3. That is, a copy of the original video signal may be made by video recorder 2 and a copy of the copy may be made by video recorder 3. If desired, further generations of copies of the video signal may be made simply by re-recording the video signal reproduced from video recorder 3 and then re-recording that video signal, and so on.

Figure 19 illustrates the condition that the copyright information signal S_1 superposed on the video signal provided by tuner 4 indicates that the viewable picture that may be produced from this video signal is subject to copyright. Hence, $S_1 = 1$. It is further assumed that the superposed copy generation signal S_2 indicates that one generation of the video signal may be recorded. Hence, $S_2 = 0$. As before, the video signal which is supplied to and recovered by tuner 4 may be broadcast thereto or may be supplied from a video disk or a video tape.

In accordance with one embodiment, to be described below, recording circuitry is included in video recorder 5 to detect the state, or condition, of the superposed copyright information-signal S_1 , and if $S_1 = 1$, the number of generations of copies that are indicated by copy generation signal S_2 is decremented. In the present case, since the copy generation signal is a single bit signal and, thus, may indicate 1 or 0 successive generations of copies that can be made from the video signal, the circuitry included in the video recorder is adapted to change over the copy generation signal from $S_2 = 0$ to $S_2 = 1$. Nevertheless, since the superposed copy generation signal supplied to video recorder 5 is $S_2 = 0$, the video recorder is permitted to record the video signal having the superposed copyright information and copy generation signals. But, in this embodiment, the superposed copy generation signal S_2 which is recorded with the video signal by video recorder 5 is changed over to $S_2 = 1$.

Consequently, when the video signal that had been recorded by video recorder 5 is reproduced, the su-

perposed copy generation signal is $S_2 = 1$; and since the superposed copyright information signal $S_1 = 1$, the reproduced video signal is inhibited from being re-recorded. Accordingly, if the video signal reproduced from video recorder 5 is supplied to another video recorder, such as video recorder 6 having copy protection circuitry incorporated therein (such as that shown in Figure 21), $S_1 = 1$ and $S_2 = 1$ inhibits video recorder 6 from recording this video signal. It will be seen, therefore, that when the video signal that is supplied to video recorder 5 includes superposed copyright information and copy generation signals $S_1 = 1$ and

$S_2 = 0$, only one generation of the video signal may be recorded and a successive generation may not. Thus, and as has been described above, video recorder 5 is enabled to record one generation of the video signal but a further generation from the video signal recorded by video recorder 5 cannot be made. That is, the copy made by video recorder 5 cannot be re-copied. Stated otherwise, only one generation of a dubbed video signal may be obtained.

As another example, Figure 20 schematically illustrates the reproduction of a video signal from, for example, a video disk player 7, wherein the reproduced video signal has superposed thereon copyright information and copy generation signals $S_1 = 1$ and $S_2 = 1$. If this video signal is supplied to a recorder, such as video recorder 8, having the copy protection circuitry of the present embodiment, the video recorder is inhibited from recording this video signal. That is, since the superposed copyright information and copy generation signals indicate that no generations of the video signal may be made, even a single generation, or copy, of the video signal is inhibited. Of course, the video signal which is reproduced by video disk player 7 may, nevertheless, be displayed as an acceptable video picture.

It will be appreciated that although a video disk player is illustrated in Figure 20, the superposed copyright information and copy generation signals $S_1 = 1$ and $S_2 = 1$ may be included in a video signal that is recorded on a video tape or that is broadcast over-the-air, by cable distribution, by direct satellite broadcast, or the like. Nevertheless, if $S_1 = 1$ and $S_2 = 1$, the video signal upon which these copyright information and copy generation signals are superposed cannot be recorded.

Turning now to Figure 21, circuitry which may be included in the recording channel of a video recorder is illustrated in block diagram form. As will be described, this circuitry is adapted to superpose onto the non-picture portion of a video signal the aforementioned copyright information and copy generation signals; and, moreover, is adapted to detect the presence of such signals which may be superposed on a received video signal so as to selectively control the recording operation of the video recorder. The illustrated circuitry is comprised of a superposition unit 10 which includes a copy protection detector 14, and also is comprised of a controllable recording signal processor 11. Let it be assumed that a video signal supplied to an input terminal A of the circuitry illustrated in Figure 21 includes the aforementioned copyright information and copy generation signals S_1 and S_2 in the non-picture portion of the video signal. In the examples discussed above, S_1 may be superposed in the twentieth line interval of the first field of a video frame and S_2 may be superposed in the twentieth line interval of the second field. Alternatively, both S_1 and S_2 may be superposed in the twentieth line interval of each field; and as yet another alternative, S_1 and S_2 may be superposed in the nineteenth and twentieth line intervals of each field. Of course, and depending upon the format of the video signal (e.g. NTSC, PAL, HD, etc.), the particular line intervals in which S_1 and S_2 are superposed may vary. Nevertheless, such line intervals are predetermined and the presence therein of the copyright information and/or copy generation signals may be readily detected by copy protection detector 14.

The copy protection detector includes a synchronizing signal separator 18, a timing generator 19 and a decoder 20. Synchronizing signal separator 18 and decoder 20 are connected in common to input terminal A to receive the video signal supplied to the input terminal. The synchronizing signal separator is adapted to separate the vertical and horizontal synchronizing pulses from the received video signal; and these separated sync pulses are used to trigger timing generator 19. As an example, the timing generator is adapted to be preset to a predetermined count in response to the separated vertical sync pulses, which count is incremented in response to each separated horizontal sync pulse. In this manner, timing generator 19 functions to count the line intervals in each field. When the line interval(s) in which the copyright information and copy generation signals are superposed are reached, the timing generator supplies an enable signal to decoder 20 whereupon the copyright information and copy generation signals then present are decoded. It will be appreciated that the copyright information and copy generation signals S_1 and S_2 are decoded by the decoder even if S_1 and S_2 are included in VBI data, discussed above.

A control unit 15 is coupled to the output of copy protection detector 14, namely the output of decoder 20, and, depending upon the decoded copyright information and copy generation signals S_1 and S_2 , the control unit selectively controls the operation of recording signal processor 11 and, moreover, supplies updated copyright information and copy generation signals to an encoder 16 for superposition in the non-picture portion of the video signal supplied by input terminal A. Encoder 16 is adapted to generate the proper signal waveform of the copyright information and copy generation signals, these signals being supplied to a mixer 17 for super-

position on the video signal. For example, the encoder is adapted to generate copyright information signal S_1 and copy generation signal S_2 having the signal waveforms shown in Figures 2 and 3, or shown in Figures 5 and 6, or shown in Figure 8, or shown in Figure 10, or shown in Figures 11-12, or shown in Figure 14 or shown in Figures 16 and 17 discussed above.

5 Recording signal processor 11 may be conventional; and the operation of the recording signal processor may be inhibited by control unit 15 if $S_1 = 1$ and $S_2 = 1$, as discussed above. Assuming that the recording signal processor is not inhibited, it supplies to a recording head 12 a suitably modulated video signal having superposed in the non-picture portion thereof the copyright information and copy generation signals produced by encoder 16 for recording on magnetic medium 13. In the present example, magnetic medium 13 comprises a
10 magnetic tape; although it will be appreciated that the magnetic medium may adopt other forms, such as a magnetic disk.

Control unit 15 may be constructed as a central processing unit (CPU), such as a microprocessor, or the like. The manner in which the control unit operates now will be described in conjunction with the flow chart illustrated in Figure 22.

15 It is assumed that timing generator 19 generates a suitable gating or window pulse to enable decoder 20 to decode copyright information signal S_1 and copy generation signal S_2 which are superposed in the predetermined line interval(s) of the non-picture portion of the received video signal discussed above. It is further assumed that control unit 15 is supplied with suitable indications of the levels, or bit values, of S_1 and S_2 . Initially, the routine executed by control unit 15 inquires, at 101, if the copyright information signal S_1 is 0 or 1. If inquiry
20 101 indicates that $S_1 = 0$, that is, the viewable picture which may be displayed from the received video signal is not subject to copyright, the routine advances to instruction 102 to control encoder 16 to supply to mixer 17 the copyright information signal $S_1 = 0$ and the copy generation signal $S_2 = 0$ or 1, depending upon the state of S_2 as decoded by decoder 20. That is, encoder 16 is controlled by control unit 15 to make no changes in the copyright information and copy generation signals as received at input terminal A. The routine then advances to step 103 which permits recording signal processor 11 to record the video signal with the new copy-
25 right information and copy generation signals superposed thereon.

If inquiry 101 is answered such that $S_1 = 1$, the routine advances to inquiry 104 to determine the state of the copy generation signal S_2 . Assuming that $S_2 = 1$, thereby indicating that no successive generations of copies can be made from the video signal supplied by input terminal A, control unit 15 inhibits recording signal processor 11 from recording the video signal, as represented by instruction 105. However, if inquiry 104 indicates
30 that $S_2 = 0$, thus representing that one generation of copies may be made from the input video signal, the routine advances to instruction 106 which modifies the state of the copy generation signal from $S_2 = 0$ to $S_2 = 1$. Additionally, the copyright information signal S_1 is regenerated as $S_1 = 1$. Mixer 17 superposes the new copyright information and copy generation signals $S_1 = 1$ and $S_2 = 1$ onto the non-picture portion of the video signal supplied by input terminal A, and the resultant, or processed, video signal is recorded on magnetic medium 13, as
35 represented by instruction 107. It will be appreciated, however, that when the video signal having the superposed copy protection information $S_1 = 1$ and $S_2 = 1$ subsequently is reproduced from magnetic medium 13, the reproduced video signal, if supplied to circuitry of the type shown in Figure 21, will not be re-recorded. That is, a second generation of the copy which was made in accordance with instruction 107 is inhibited.

40 It will be seen that the flow charts shown in Figure 22 may be summarized by Table 1, discussed above. It is recognized that if copyright information signal S_1 is 1, the copy generation signal S_2 is decremented. However, if $S_1 = 1$ and $S_2 = 1$, there is no need to decrement the copy generation signal because recording of the video signal (having S_1 and S_2 superposed thereon) is inhibited.

45 As another embodiment, a video signal recorded on a record medium which includes copy protection information, such as the aforementioned superposed copyright information and copy generation signals S_1 and S_2 , may be reproduced from the record medium and the copy protection information may be re-superposed on the reproduced video signal in the proper, predetermined line intervals. An example of circuitry adapted to carry out this operation is illustrated in the block diagram shown in Figure 23. The illustrated circuitry comprises a reproducing signal processor 23 and a superposition unit 24, the latter being coupled to the reproducing signal
50 processor and being adapted to superpose onto the non-picture portion of the video signal processed by the reproducing signal processor the copyright information signal S_1 and the copy generation signal S_2 . A video signal reproduced by a head 22 from record medium 21 is assumed to include copy protection information. In one embodiment, the copy protection information consists of the aforementioned copyright information and copy generation signals S_1 and S_2 ; and in another embodiment, the copy protection information consists of a
55 predetermined signal, waveform or code intended to indicate whether the viewable picture which may be displayed from the video signal is subject to copyright and also to indicate whether 1 or 0 generations of copies can be made from the reproduced video signal. The reproduced video signal containing this copy protection information is suitably processed by reproducing signal processor 23 (e.g. the video signal is demodulated,

equalized, etc.) and supplied to superposition unit 24.

The superposition unit includes a copy protection detector 25, a control unit 26, an encoder 27 and a mixer 28, the latter being adapted to superpose onto the non-picture portion of the reproduced video signal copyright information and copy generation signals S_1 and S_2 produced by encoder 27. Copy protection detector 25 is coupled to the output of reproducing signal processor 23 and is adapted to detect the aforementioned copy protection information included in the reproduced video signal. It is appreciated that this copy protection information may take the form of signals S_1 and S_2 ; or other waveforms or codes may be used, as mentioned above. In the preferred embodiment, the copy protection information is in the form of signals S_1 and S_2 which admit of the states discussed above and shown in Table 1.

Upon detecting the status of the copyright information and copy generation signals, copy protection detector 25 supplies suitable status indications to control unit 26 which, in turn, controls encoder 27 to supply to mixer 28 updated, or new copyright information and copy generation signals. In one embodiment, the copyright information and copy generation signals which are detected by copy protection detector 25 are regenerated and supplied to mixer 28 to be superposed onto the appropriate line intervals of the video signal, discussed above. In another embodiment, the copy protection information included in the reproduced video signal is other than the signals S_1 and S_2 ; and control unit 26 is responsive to the detected copy protection information to control encoder 27 to supply to mixer 28 copyright information and copy generation signals S_1 and S_2 of appropriate states. For example, if the copy protection information indicates that the viewable picture which may be displayed from the reproduced video signal is not subject to copyright, control unit 26 controls encoder 27 to supply the copyright information signal $S_1 = 0$. However, if the copy protection information indicates that the viewable picture which may be displayed from the reproduced video signal is subject to copyright information, encoder 27 is controlled to supply to mixer 28 the copyright information signal $S_1 = 1$. Similarly, if the copy protection information included in the reproduced video signal indicates that the video signal is not to be copied, control unit 26 controls encoder 27 to supply to mixer 28 the copy generation signal $S_2 = 1$.

As a result, mixer 28 supplies to an output terminal the reproduced video signal on which the copyright information and copy generation signals S_1 and S_2 are superposed in the non-picture portion thereof.

Control unit 26 may be in the form of a central processor unit (CPU) such as a microprocessor programmed to operate in accordance with the routine illustrated by the flow chart of Figure 24. This routine operates as follows:

Initially, inquiry is made as to whether the copy protection information detected by copy protection detector 25 indicates (a) that the reproduced video signal may be copied without limitation, or (b) that the reproduced video signal may be recorded to provide but a single generation of copies, or (c) that the video signal may not be copied. This inquiry is determined by examining the copyright information and copy generation signals S_1 and S_2 . Let it be assumed that $S_1 = 0$, meaning that the reproduced video signal may be copied without limitation. As a result, control unit 26 advances to instruction 112 so as to control encoder 27 to supply to mixer 28 the signals $S_1 = 0$ and $S_2 = 0$ or 1, depending upon whether the copy generation signal S_2 that had been superposed in the video signal recorded on medium 21 is a 0 or 1. As a result of instruction 112, the video signal supplied to the output terminal shown in Figure 23 has superposed on the non-picture portion thereof the copyright information and copy generation signals $S_1 = 0$ and $S_2 = 0$ or 1.

As another example, let it be assumed that the copy protection information included in the reproduced video signal indicates that only one generation of copies may be made from that video signal. As a result, inquiry 111 indicates that $S_1 = 1$ and $S_2 = 0$. That is, control unit 26 indicates that the viewable picture which may be displayed from the reproduced video signal is subject to copyright ($S_1 = 1$) and only one generation of copies may be made therefrom ($S_2 = 0$). As a result, the routine advances to instruction 113, whereby encoder 27 is controlled to supply to mixer 28 the copyright information and copy generation signals $S_1 = 1$ and $S_2 = 0$. These copyright information and copy generation signals are superposed onto the non-picture portion of the reproduced video signal; and the superposed video signal is supplied to the output terminal from mixer 28.

As yet another example, let it be assumed that the copy protection information included in the video signal reproduced from medium 21 indicates that the video signal cannot be copied. For example, let it be assumed that the reproduced video signal contains superposed copyright information and copy generation signals $S_1 = 1$ and $S_2 = 1$. Hence, inquiry 111 is answered such that the routine advances to instruction 114, whereby encoder 27 is controlled to supply to mixer 28 the copyright information and copy protection signals $S_1 = 1$ and $S_2 = 1$. These copyright information and copy generation signals are superposed onto the non-picture portion of the reproduced video signal and supplied to the output terminal shown in Figure 23. It will be appreciated that if this video signal is received by a video recorder which includes the circuitry shown in Figure 21, the recorder will be inhibited from recording that video signal.

In the examples discussed above, it is assumed that copy generation signal S_2 is comprised of a single bit signal. It is further assumed that when $S_2 = 0$, one generation of copies may be made from the video signal

and when $S_2 = 1$, zero generations of copies may be made. It is contemplated, however, that copy generation signal S_2 may be a plural-bit signal capable of representing a count which is indicative of the number of successive generations or copies that can be made from the video signal. For example, if copy generation signal S_2 is a 2-bit signal, then up to three generations of copies may be indicated. If S_2 is a 3-bit signal, then up to seven generations of copies may be indicated. For convenience, and in order to simplify the following discussion, it is assumed that S_2 is a 2-bit signal.

As one example, let it be assumed that the copyright information signal S_1 is a single bit signal and copy generation signal S_2 is a 2-bit signal and that both signals S_1 and S_2 are superposed in line 20 of each field. For example, in the NTSC format, S_1 and S_2 are superposed in line 20 of the first field and line 283 of the second field, as illustrated in Figure 25. Alternatively, if VBID data is included in the non-picture portion of each field, for example, if VBID data is included in the twentieth line interval of each field, then copyright information and copy generation signals S_1 and S_2 are included in such VBID data, such as illustrated in Figure 26.

Although a complete and full understanding of the VBID data and the various types of information represented thereby is not necessary to an adequate understanding of the present embodiment, a brief description of the VBID data now follows. As shown in Figure 26, the VBID data is comprised of four separate data fields designated A, B, C and D. The A field is comprised of two bits representing identifying data. The B field is comprised of four bits representing a mode number. The C field is comprised of eight bits representing data or data flags. The D field is comprised of six bits representing an error check code such as cyclic redundancy check code.

More particularly, the identifying data (the A field) constitutes discrimination data relating to the picture signal transmission system wherein the first bit represents the aspect ratio of the viewable picture that may be displayed from the video signal (e.g. an aspect ratio of 16:9 or an aspect ratio of 4:3); and the second bit indicates a standard system or a letter box system. The foregoing may be summarized by Table 2 as follows:

TABLE 2

| Bit Number | 1 | 0 | Contents |
|------------|------------|----------|---------------------------|
| bit 1 | 16:9 | 4:3 | Transmission Aspect Ratio |
| bit 2 | Letter Box | Standard | Picture Display Format |

The mode number data (the B field) is adapted to classify the data or the flags included in the C field into one of sixteen different types. A summary of these types of data or flags is summarized in Table 3, wherein the expression "TBD" means "to be determined."

TABLE 3

| Mode Number (B) | Contents | Coding (C) |
|-----------------|------------|---------------------------|
| 0000 | System | Flags (TABLE 4) |
| 0001 | Year | BCD (00 ~ 99) |
| 0010 | Month | BCD (01 ~ 12) |
| 0011 | Day | BCD (01 ~ 31) |
| 0100 | Hour | BCD (00 ~ 29) |
| 0101 | Minute | BCD (00 ~ 59) |
| 0110 | TBD | |
| 0111 | TBD | |
| 1000 | TBD | |
| 1001 | TBD | |
| 1010 | TBD | |
| 1011 | TBD | |
| 1100 | Text Start | Binary (Text Data Format) |
| 1101 | Text Data | Binary or ASCII |
| 1110 | Text End | Binary (Check Sum) |
| 1111 | TBD | |

In Table 3, mode number [0000] means that the 8-bit data in the C field represents a system flag. Mode number [0001] means that the 8-bit data in the C field represents the year in which the video signal was recorded. The mode number [1100] indicates the start of a letter string of text data; mode number [1101] means that the 8-bit data in the C field represents an alphabetic letter; and mode number [1110] indicates the end of a letter string (e.g. the letter data represented in the 8-bit C field is the last letter in the string). It will be appreciated that alphabetic data thus permits text information, such as the title of the video program, to be included in the video signal itself.

If the mode number represented by the B field is [0000], the system flags represented by the eight bits of the C field may be summarized as follows:

TABLE 4

| Bit Number | Flag Name | 1 | 0 |
|------------|-----------------------------------|-------------------|------------------|
| bit 0 | Copyright Information S_1 | Copyright Present | Copyright Absent |
| bit 1 | Copy Generation Information S_2 | TABLE 5 | |
| bit 2 | | | |
| bit 3 | 3D Info. | Yes | No |
| bit 4 | TBD | | |
| bit 5 | TBD | | |
| bit 6 | TBD | | |
| bit 7 | Title Info. | Yes | No |

It is seen that bit 0 of the system flags represents copyright information signal S_1 and bits 1 and 2 of the system flags represent copy generation signal S_2 . Bit 3 of the system flags indicates whether the viewable picture which may be displayed from the video signal is a three-dimensional (3-D) picture; and bit 7 of the system flags indicates whether or not the letter box (see Table 2) contains title information. It is appreciated that the representations of bits 4, 5 and 6 of the system flags are to be determined at a future time.

The three-dimensional information represented by bit 3 of the system flags is used to control a 3-D mode in which a picture is recorded with parallax between the odd and even fields, and switching is effected between the odd and even fields by a liquid crystal shutter during picture reproduction for stereoscopic representation. The information represented by bit 7 of the system flags controls the sliding of the title from the black area of the video picture so as to be displayed in another area and to prevent zooming which may result in extinguishing the title if a wide aspect ratio picture is to be displayed and the title is disposed in the black area of the letter box.

Since the copy generation signal S is represented by two bits, it is appreciated that up to three successive generations of copies can be made from the video signal in which this copy generation signal is superposed, depending upon the values of the S_2 bits. For example, if the copyright information signal S_1 is 1, then the number of possible generations of copies that can be made from the video signal are as summarized below in Table 5:

TABLE 5

| Bit 1 | Bit 2 | Number of Possible Copy Generations |
|-------|-------|-------------------------------------|
| 1 | 1 | 3 Generations |
| 1 | 0 | 2 Generations |
| 0 | 1 | 1 Generation |
| 0 | 0 | None |

Table 6 provides a summary of the copy control which may be effected by the single bit copyright information signal S_1 and the 2-bit copy generation signal S_2 :

TABLE 6

| Copyright Info. S_1 | Copy Generation Info. S_2 | Copy Generation Limit |
|-----------------------|-----------------------------|-------------------------|
| 0 | 00 | No Limitation |
| 0 | 01 | No Limitation |
| 0 | 10 | No Limitation |
| 0 | 11 | No Limitation |
| 1 | 00 | Inhibited |
| 1 | 01 | 1 Generation Permitted |
| 1 | 10 | 2 Generations Permitted |
| 1 | 11 | 3 Generations Permitted |

Copy control as a function of the copyright information and copy generation signals S_1 and S_2 summarized in Table 6 are schematically depicted by the block diagrams shown in Figures 27-31. As is apparent from Figure 27, if a source 30 of video signals (e.g. a video disk, a prerecorded video tape, a broadcast transmission, or the like) has superposed in the non-picture portion of the video signal the copyright information and copy generation signals $S_1 = 0$ and $S_2 = 0$, then this video signal may be recorded by a video recorder 31 without any change or modification in the copy generation signal S_2 . Moreover, the video signal recorded by video recorder 31 subsequently may be reproduced and re-recorded as a second generation copy by a video recorder 32. Here too, the superposed copyright information and copy generation signals remain as $S_1 = 0$ and $S_2 = 00$. It will be appreciated that successive generations of copies of the video signal recorded by video recorder 32 may be made, for example, a third generation may be recorded by recorder 33, still without any change or modification in the copyright information and copy generation signals.

It will be appreciated that Figure 27 is applicable regardless of the number of successive generations of copies that is represented by the copy generation signal S_2 .

Now, let it be assumed that the video signal which is supplied by source 30 includes a superposed copyright information signal $S_1 = 1$, which indicates that the viewable picture which may be displayed from the video signal is subject to copyright, and the copy generation signal $S_2 = 00$, which indicates that no generations of copies can be made from this video signal. This information is detected by a control unit included in video recorder 31 (e.g. control unit 15 of Figure 21) which is inhibited by S_1 and S_2 from recording the video signal.

As another example, if the superposed copyright information and copy generation signals included in the video signal supplied by source 30 are $S_1 = 1$ and $S_2 = 01$, only one generation of copies may be made. Hence, the control unit included in recorder 31 detects S_1 and S_2 and permits the video signal to be recorded. However, the control unit superposes a new, or modified, copyright information signal $S_2 = 00$ in the non-picture portion of the video signal which is recorded by recorder 31. As a result, when the video signal having the modified copy generation signal superposed thereon is reproduced, this reproduced video signal cannot be re-recorded by, for example, recorder 32. Hence, only one copy of the video signal supplied by source 30 may be recorded, as represented by Figure 29.

Turning to Figure 30, let it be assumed that the superposed copyright information and copy generation signals supplied by source 30 are $S_1 = 1$ and $S_2 = 10$. This represents that two generations of the video signal may be recorded. It is appreciated that the control unit included in video recorder 31 modifies the copy generation signal from $S_2 = 10$ to $S_2 = 01$; and the video signal with the modified copy generation signal is recorded by video recorder 31. As shown in Figure 30, the copyright information signal $S_1 = 1$ likewise is recorded by recorder 31. Now, when the video signal which had been recorded by recorder 31 is reproduced and supplied to video recorder 32 for re-recording, the count represented by copy generation signal $S_2 = 01$ is decremented by the control unit included in recorder 32 to the count $S_2 = 00$; and this decremented count, together with the copyright information signal $S_1 = 1$, is superposed on the video signal played back from video recorder 31 and recorded by video recorder 32. However, when the video signal recorded by recorder 32 is reproduced, it cannot be re-recorded by, for example, video recorder 33, because $S_1 = 1$ and $S_2 = 00$; and this information is detected by the control unit included in video recorder 33 to inhibit that recorder from re-recording the video signal. Consequently, only two generations of the video signal may be recorded by video recorders 31 and 32, respectively, but a third generation is inhibited.

Finally, and as represented by Figure 31, if the superposed copyright information and copy generation signals included in the video signals supplied by source 30 are assumed to be $S_1 = 1$ and $S_2 = 11$, then three generations of successive copies of this video signal may be made. A first generation is recorded by video recorder 31; but the control unit therein modifies the copy generation signal from $S_2 = 11$ to $S_2 = 10$. This modified copy generation signal together with the copyright information signal are superposed on the video signal recorded by video recorder 31.

When the video signal that had been recorded by video recorder 31 is reproduced and supplied to video recorder 32 for re-recording, it is appreciated that video recorder 32 modifies the copy generation signal from $S_2 = 10$ to $S_2 = 01$. This modified copy generation signal together with the copyright information signal $S_1 = 1$ are superposed on the video signal reproduced by video recorder 31 and recorded by video recorder 32.

Similarly, when the video signal which had been recorded by video recorder 32 is reproduced to be re-recorded by recorder 33, the control unit included in recorder 33 modifies the copy generation signal from $S_2 = 01$ to $S_2 = 00$. The modified copy generation signal and copyright information signal $S_1 = 1$ are recorded by video recorder 33.

Now, however, when the video signal which had been recorded by recorder 33 is reproduced to be re-recorded by recorder 34, the status of S_1 and S_2 is detected by the control unit included in video recorder 34; and since $S_1 = 1$ and $S_2 = 00$, video recorder 34 is inhibited from re-recording the video signal that had been recorded by video recorder 33. As a consequence, only three generations of the video signal provided by source 30 may be recorded, namely the first generation by recorder 31, the second generation by recorder 32 and the third generation by recorder 33. No further generations of copies may be made.

It will be appreciated that in the block diagrams shown in Figures 27-31, each video recorder includes the circuitry shown in Figure 21 in the recording channel thereof and also the circuitry shown in Figure 23 in the reproducing channel thereof. Hence, if the copyright information signal supplied to a video recorder is $S_1 = 1$, the circuitry included in the recording channel operates to decrement the count represented by the copy generation signal S_2 . Of course, if $S_2 = 00$, the count represented thereby is not decremented and, moreover, the video recorder is inhibited from recording the video signal.

While the present invention has been particularly shown and described with reference to preferred embodiments, it will be readily appreciated that various modifications may be made without departing from the scope of the invention. For example, it may be preferable to omit the copyright information signal S_1 and simply control the number of successive generations of copies that can be made from the video signal as a function of the copy generation signal S_2 .

It is intended that the appended claims be interpreted so as to cover the embodiments which have been discussed above, all variations and modifications which have been described or suggested, and all equivalents thereto.

Claims

1. A method of processing a video signal to selectively permit copying thereof, said video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion, said method comprising the steps of generating a copyright information signal indicative of whether the viewable picture is subject to copyright; generating a copy generation signal indicative of the number of successive generations of copies that can be made from the processed video signal; and superposing both the copyright information signal and the copy generation signal in the non-picture portion of said video signal to produce said processed video signal.
2. A video signal record medium having recorded thereon a video signal comprised of an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion; a copyright information signal indicative of whether the viewable picture is subject to copyright, said copyright information signal being superposed in said non-picture portion; and a copy generation signal indicative of the number of successive generations of copies that can be made from the recorded video signal, said copy generation signal being superposed in said non-picture portion.
3. A method of recording a video signal that may be selectively copied, said video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion, said method comprising the steps of generating a copyright information signal indicative of whether the viewable picture is subject to copyright; generating a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal; superposing both

the copyright information signal and the copy generation signal in the non-picture portion of said video signal to produce a processed video signal; and recording said processed video signal on a record medium.

- 5 4. A method of selectively recording a video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion in which are superposed a copyright information signal indicative of whether the viewable picture is subject to copyright and a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal, said method comprising the steps of detecting said copyright information signal and
10 said copy generation signal; modifying the superposed copy generation signal to indicate a decremented number of successive generations of copies that can be made from the video signal if said copyright information signal indicates that the viewable picture is subject to copyright; recording the video signal having superposed thereon said copyright information signal and said modified copy generation signal; and selectively inhibiting the recording of the video signal when said copyright information signal indicates that
15 said viewable picture is subject to copyright and the detected copy generation signal indicates that no successive generations of copies may be made from the video signal.
5. A method according to Claim 4, wherein said step of modifying the superposed copy generation signal comprises generating a new copy generation signal indicative of one less than the number of successive
20 generations of copies which are indicated by the detected copy generation signal, and superposing said new copy generation signal in said non-picture portion of the video signal.
6. A method according to Claim 5, further comprising the steps of regenerating the detected copyright information signal, and superposing said regenerated copyright information signal in said non-picture portion
25 of the video signal.
7. A method of selectively recording a video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion in which is superposed a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal, said method comprising the steps of detecting said copy generation signal;
30 modifying the superposed copy generation signal to indicate a decremented number of successive generations of copies that can be made from the video signal; recording the video signal having superposed thereon the modified copy generation signal; and inhibiting the recording of the video signal when the detected copy generation signal indicates that no successive generations of copies may be made from the video signal.
35
8. A method according to Claim 7, wherein said step of modifying the superposed copy generation signal comprises generating a new copy generation signal indicative of one less than the number of successive
40 generations of copies which are indicated by the detected copy generation signal, and superposing said new copy generation signal in said non-picture portion of the video signal.
9. A method of reproducing a video signal having an effective picture portion and a non-picture portion and containing copy protection information representing whether a video picture derived from said video signal is subject to copyright and whether successive generations of copies can be made from said video signal,
45 said method comprising the steps of playing back said video signal from a record medium; detecting said copy protection information in the played back video signal; generating a copyright information signal indicative of whether said video picture is subject to copyright; generating a copy generation signal indicative of the number of successive generations of copies that can be made from said played back video signal; and superposing both said copyright information signal and said copy generation signal in the non-picture portion of said played back video signal.
50
10. A method according to Claim 9, wherein said copy protection information comprises a recorded copyright information signal and a recorded copy generation signal, both superposed in the non-picture portion of the video signal on said record medium, and both being detected to cause the detected copyright information and copy generation signals to be re-superposed in the non-picture portion of said played back
55 video signal.
11. Apparatus for processing a video signal to selectively permit copying thereof, said video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed

and a non-picture portion, said apparatus comprising means for generating a copyright information signal indicative of whether the viewable picture is subject to copyright; means for generating a copy generation signal indicative of the number of successive generations of copies that can be made from the processed video signal; and means for superposing both the copyright information signal and the copy generation signal in the non-picture portion of said video signal to produce said processed video signal.

12. Apparatus for recording a video signal that may be selectively copied, said video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion, said apparatus comprising means for generating a copyright information signal indicative of whether the viewable picture is subject to copyright; means for generating a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal; means for superposing both the copyright information signal and the copy generation signal in the non-picture portion of said video signal to produce a processed video signal; and means for recording said processed video signal on a record medium.

13. Apparatus for selectively recording a video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion in which are superposed a copyright information signal indicative of whether the viewable picture is subject to copyright and a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal, said apparatus comprising means for detecting said copyright information signal and said copy generation signal; means for modifying the superposed copy generation signal to indicate a decremented number of successive generations of copies that can be made from the video signal if said copyright information signal indicates that the viewable picture is subject to copyright; means for recording the video signal having superposed thereon said copyright information signal and said modified copy generation signal; and means for selectively inhibiting the recording of the video signal when said copyright information signal indicates that said viewable picture is subject to copyright and the detected copy generation signal indicates that no successive generations of copies may be made from the video signal.

14. Apparatus according to Claim 13, wherein said means for modifying the superposed copy generation signal comprises means for generating a new copy generation signal indicative of one less than the number of successive generations of copies which are indicated by the detected copy generation signal, and means for superposing said new copy generation signal in said non-picture portion of the video signal.

15. Apparatus according to Claim 14, wherein said means for recording includes means for regenerating the detected copyright information signal, and means for superposing said regenerated copyright information signal in said non-picture portion of the video signal prior to the recording of said video signal.

16. Apparatus for selectively recording a video signal having an effective picture portion containing useful picture information from which a viewable picture is displayed and a non-picture portion in which is superposed a copy generation signal indicative of the number of successive generations of copies that can be made from the video signal, said apparatus comprising means for detecting said copy generation signal; means for modifying the superposed copy generation signal to indicate a decremented number of successive generations of copies that can be made from the video signal; means for recording the video signal having superposed thereon the modified copy generation signal; and means for inhibiting the recording of the video signal when the detected copy generation signal indicates that no successive generations of copies may be made from the video signal.

17. Apparatus according to Claim 16 wherein said means for modifying the superposed copy generation signal comprises means for generating a new copy generation signal indicative of one less than the number of successive generations of copies which are indicated by the detected copy generation signal, and means for superposing said new copy generation signal in said non-picture portion of the video signal.

18. Apparatus according to Claim 17 wherein said copy generation signal represents a count and said means for generating a new copy generation signal is operable to generate a decremented count.

19. Apparatus for reproducing a video signal having an effective picture portion and a non-picture portion and containing copy protection information representing whether a video picture derived from said video signal is subject to copyright and whether successive generations of copies can be made from said video

signal, said apparatus comprising means for playing back said video signal from a record medium; means for detecting said copy protection information in the played back video signal; means for generating a copyright information signal indicative of whether said video picture is subject to copyright; means for generating a copy generation signal indicative of the number of successive generations of copies that can be made from said played back video signal; and means for superposing both said copyright information signal and said copy generation signal in the non-picture portion of said played back video signal.

20. A method, apparatus or record medium according to any one of the preceding claims, wherein said video signal contains line intervals and said copyright information signal and said copy generation signal are superposed in respectively different line intervals.
21. A method, apparatus or record medium according to Claim 20, wherein said video signal contains frame intervals, each formed of field intervals, and said different line intervals are in the same field interval.
22. A method, apparatus or record medium according to Claim 20, wherein said video signal contains frame intervals, each formed of field intervals, and said different line intervals are in different field intervals of the same frame interval.
23. A method, apparatus or record medium according to any one of Claims 1 to 19, wherein said video signal contains line intervals and said copyright information signal and said copy generation signal are superposed in the same line interval.
24. A method, apparatus or record medium according to any one of Claims 1 to 19, wherein said non-picture portion includes a vertical blanking interval and said copyright information signal and said copy generation signal are superposed in the vertical blanking interval.
25. A method, apparatus or record medium according to any one of Claims 1 to 19, wherein said copy generation signal is a plural bit signal.
26. Apparatus according to Claim 19, wherein said copy protection information comprises a recorded copyright information signal and a recorded copy generation signal, both superposed in the non-picture portion of the video signal on said record medium, and said means for detecting is operable to detect both said copyright information and copy generation signals in the played back video signal; and said means for superposing is operable to re-superpose the detected copy information and copy generation signals in the non-picture portion of said played back video signal.

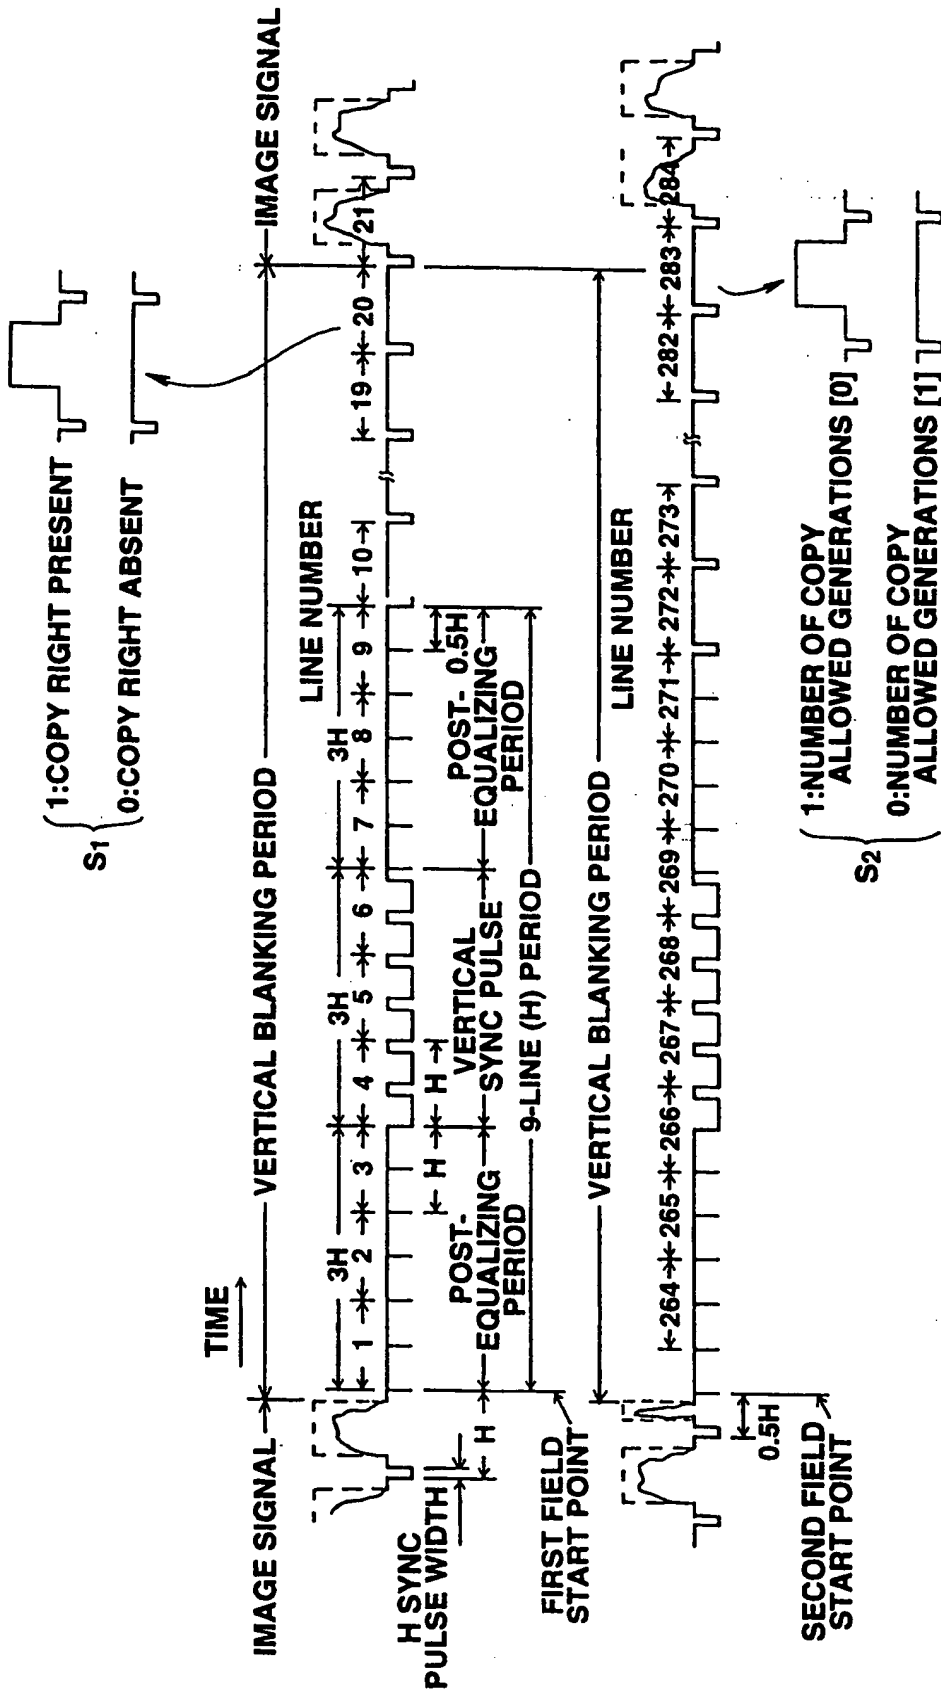


FIG.1

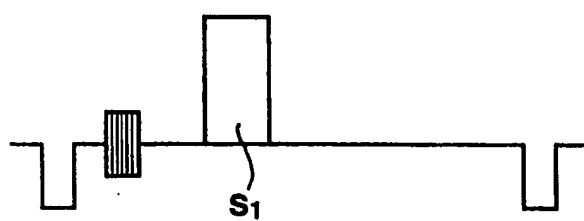


FIG. 2

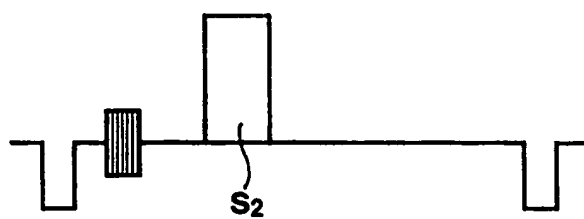


FIG. 3

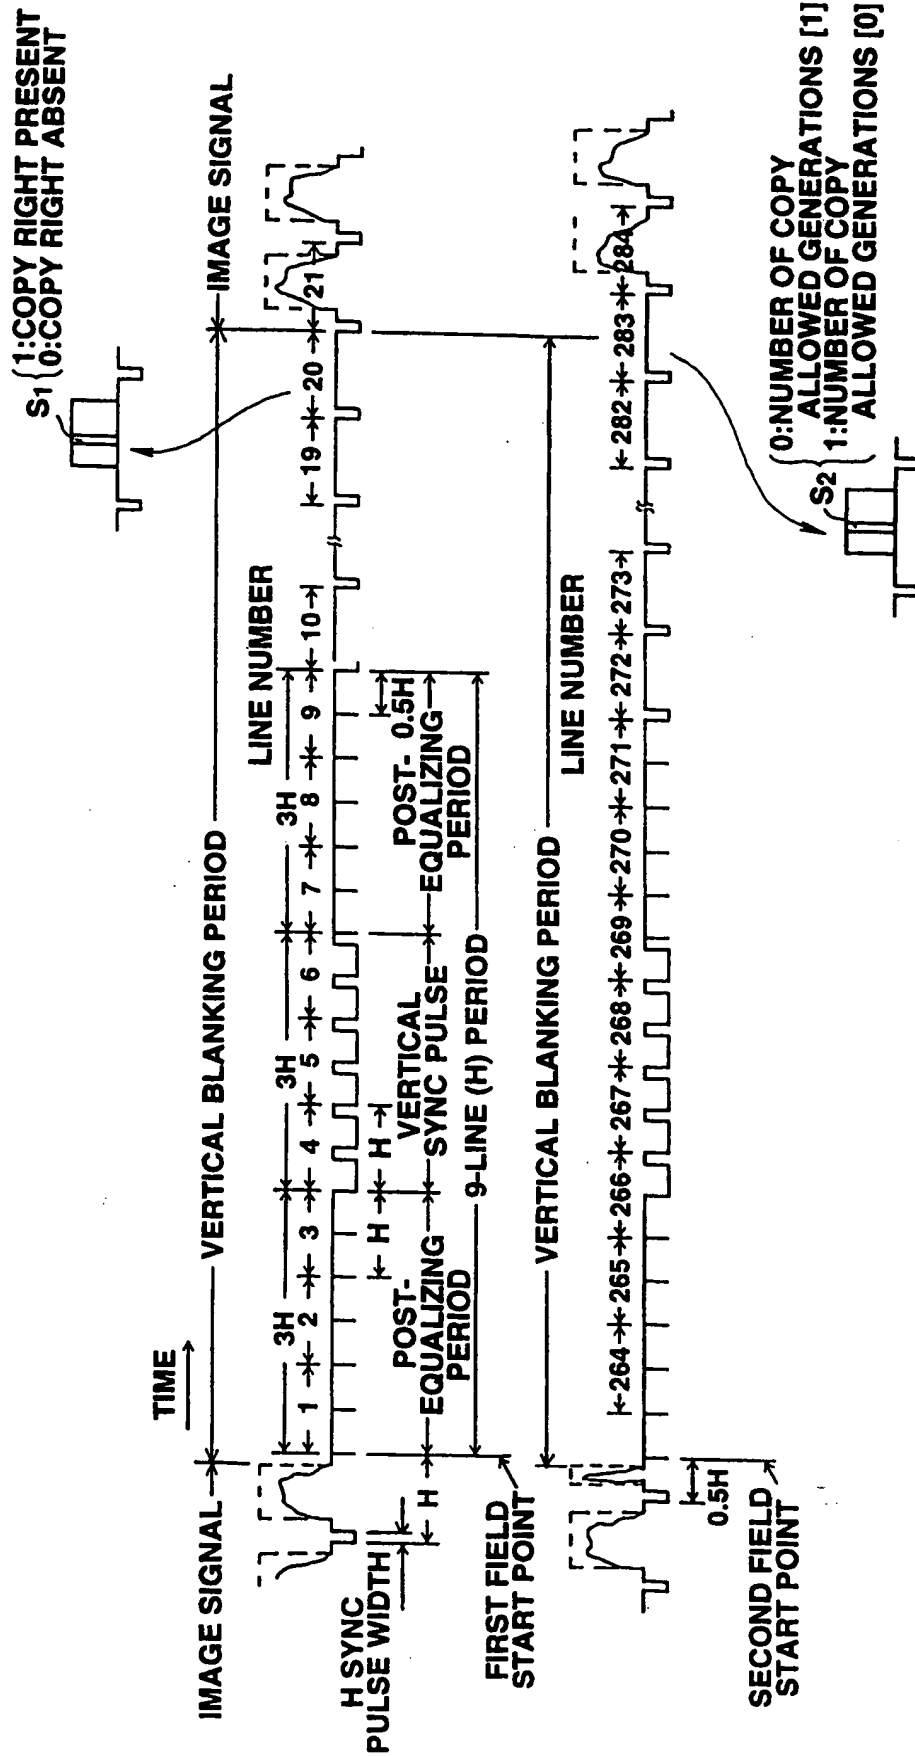


FIG.4

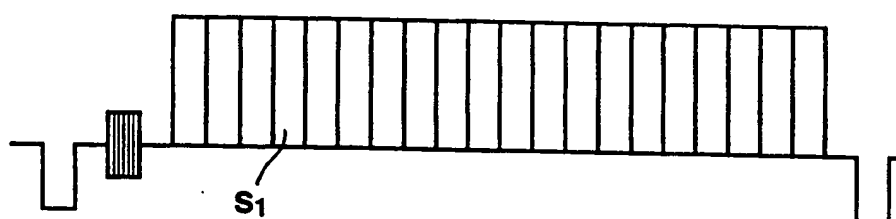


FIG.5

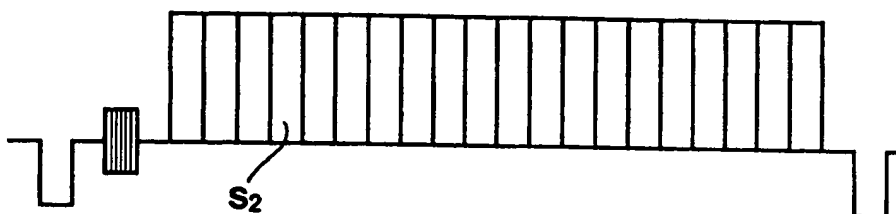


FIG.6

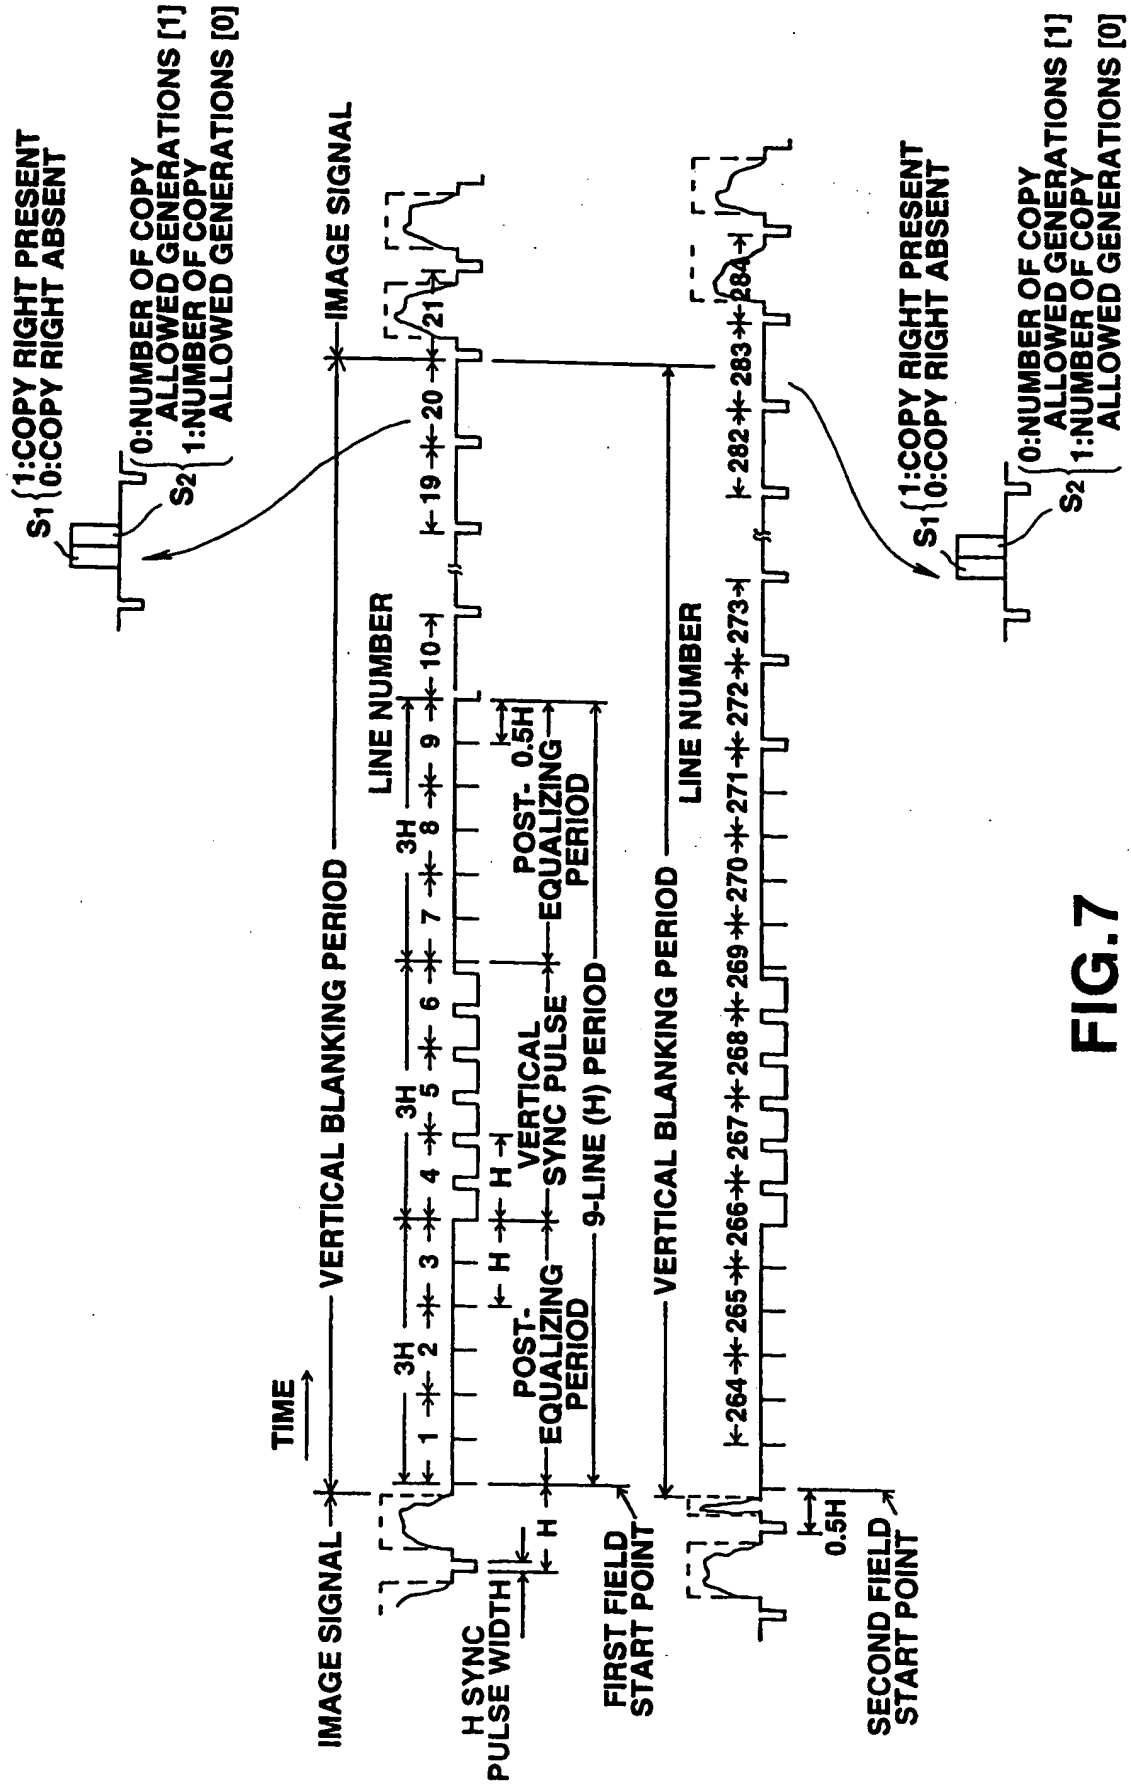


FIG.7

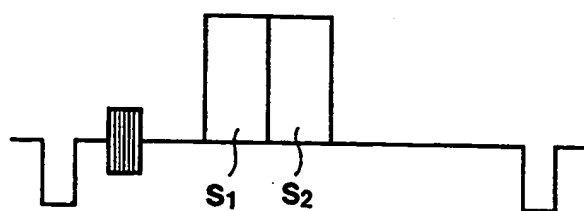
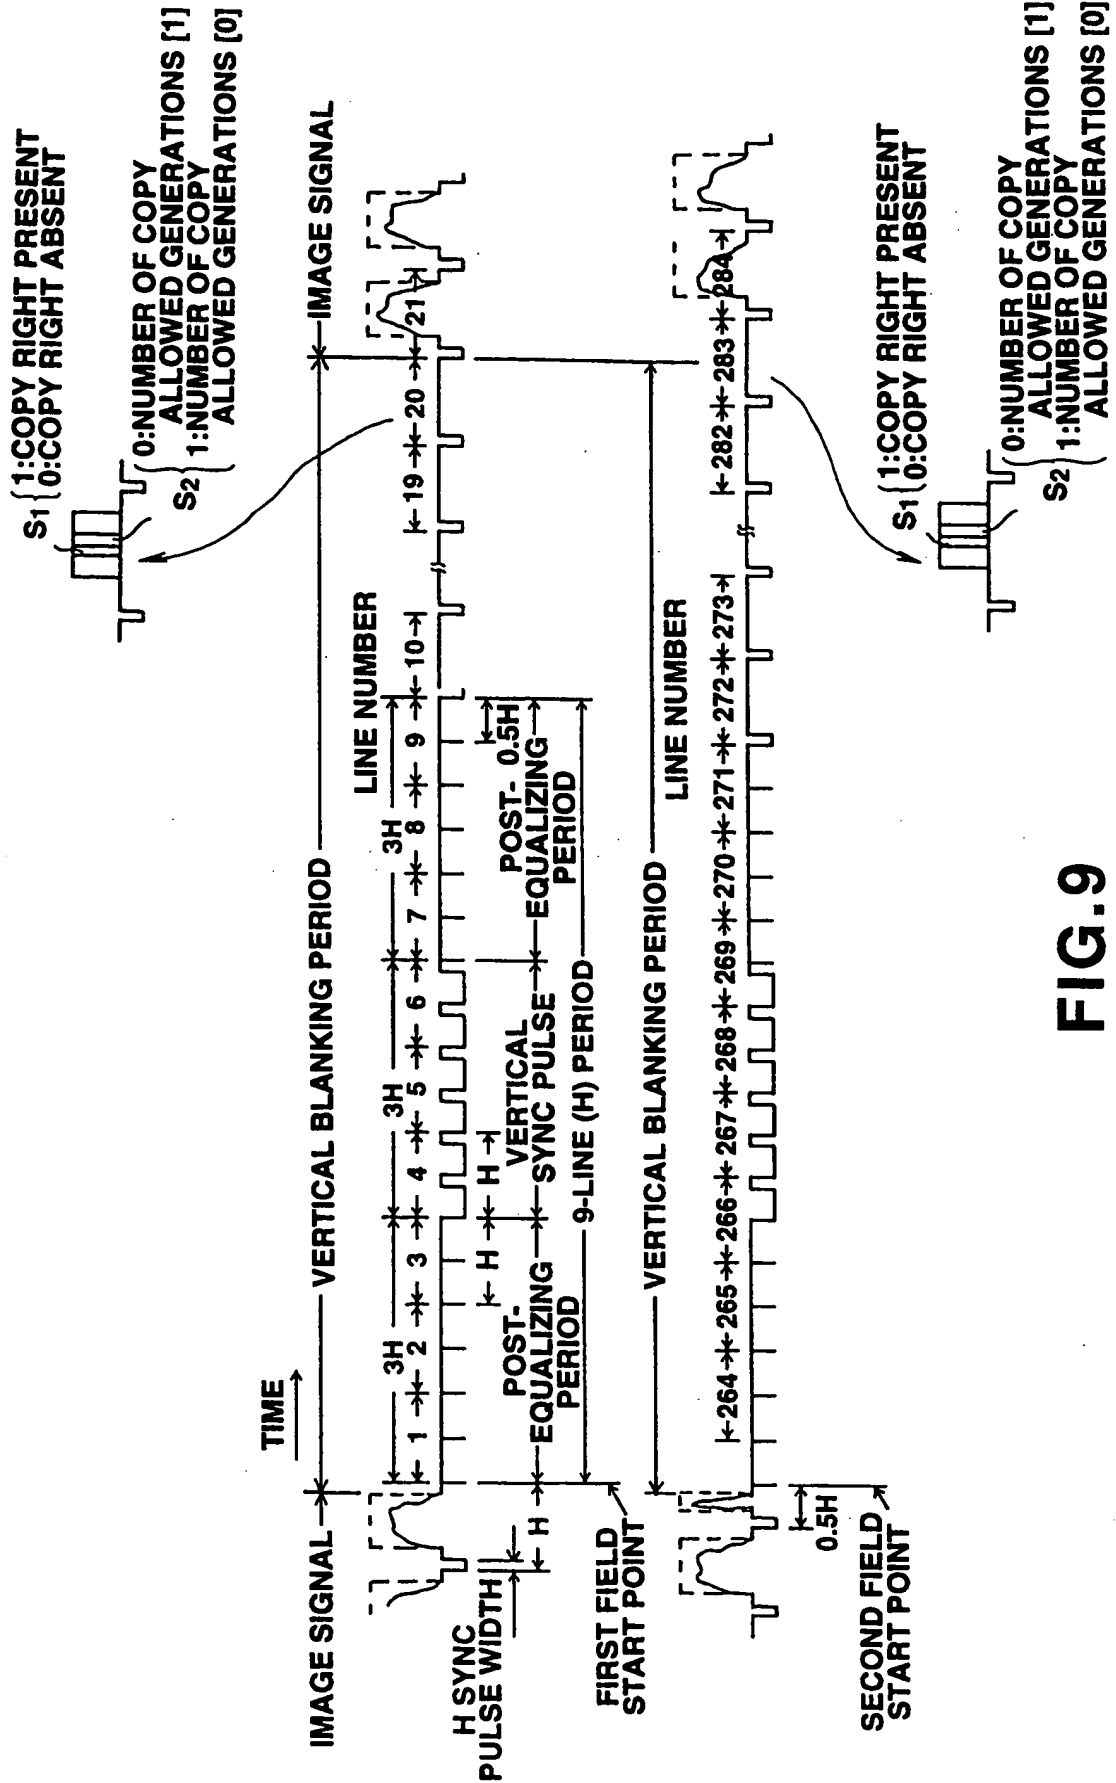


FIG.8



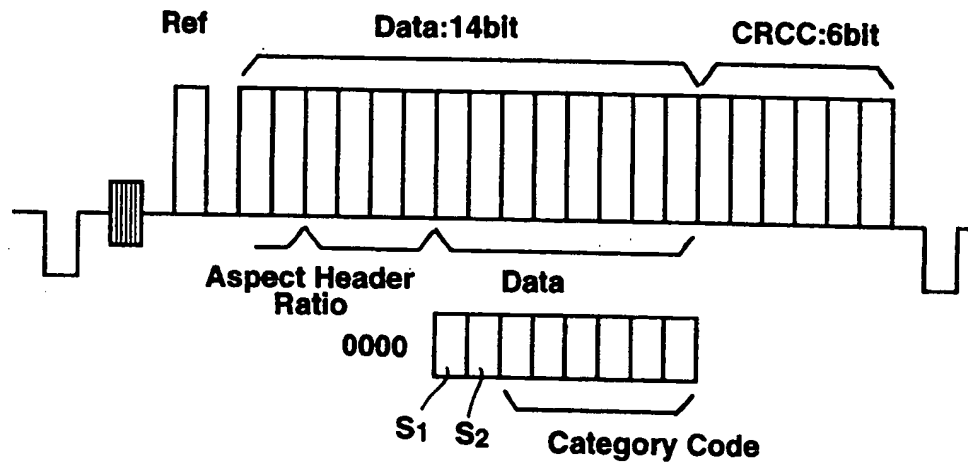


FIG.10

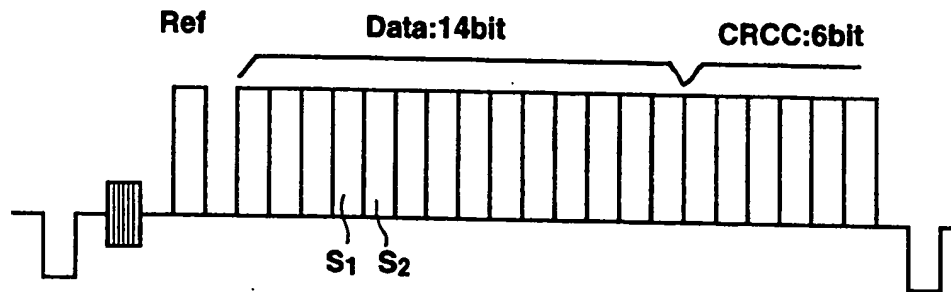


FIG.11

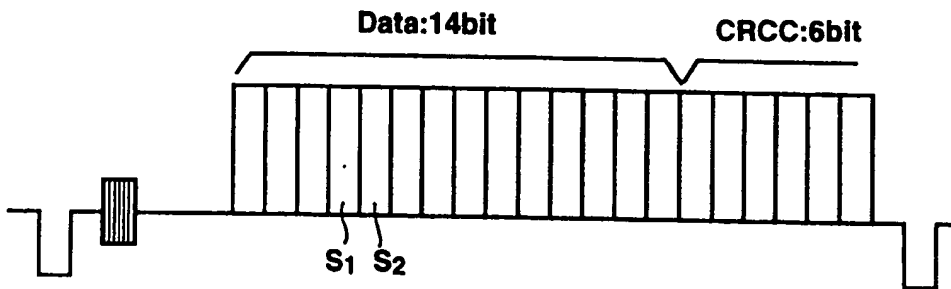


FIG.12

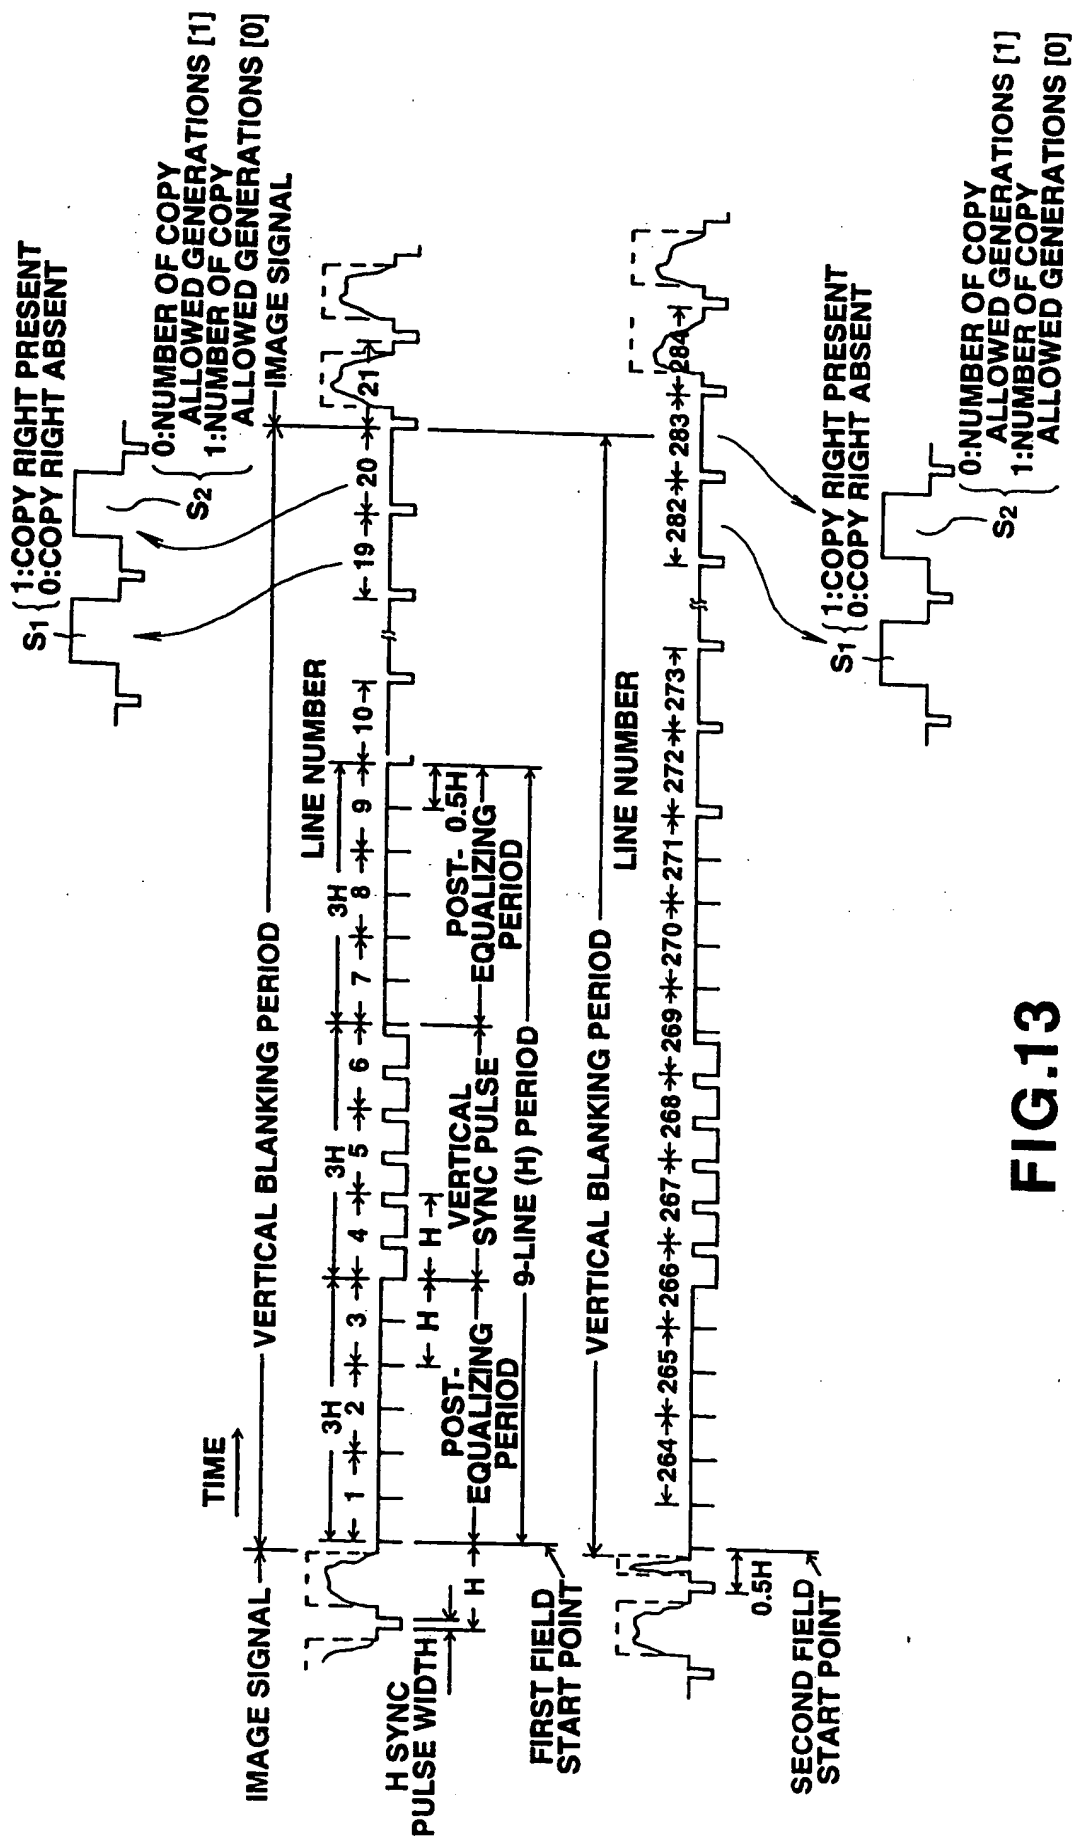


FIG.13

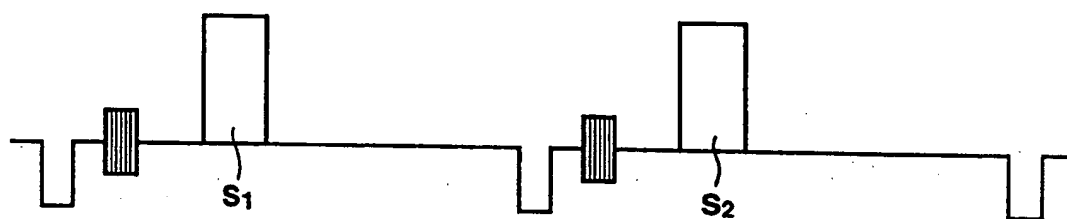


FIG.14

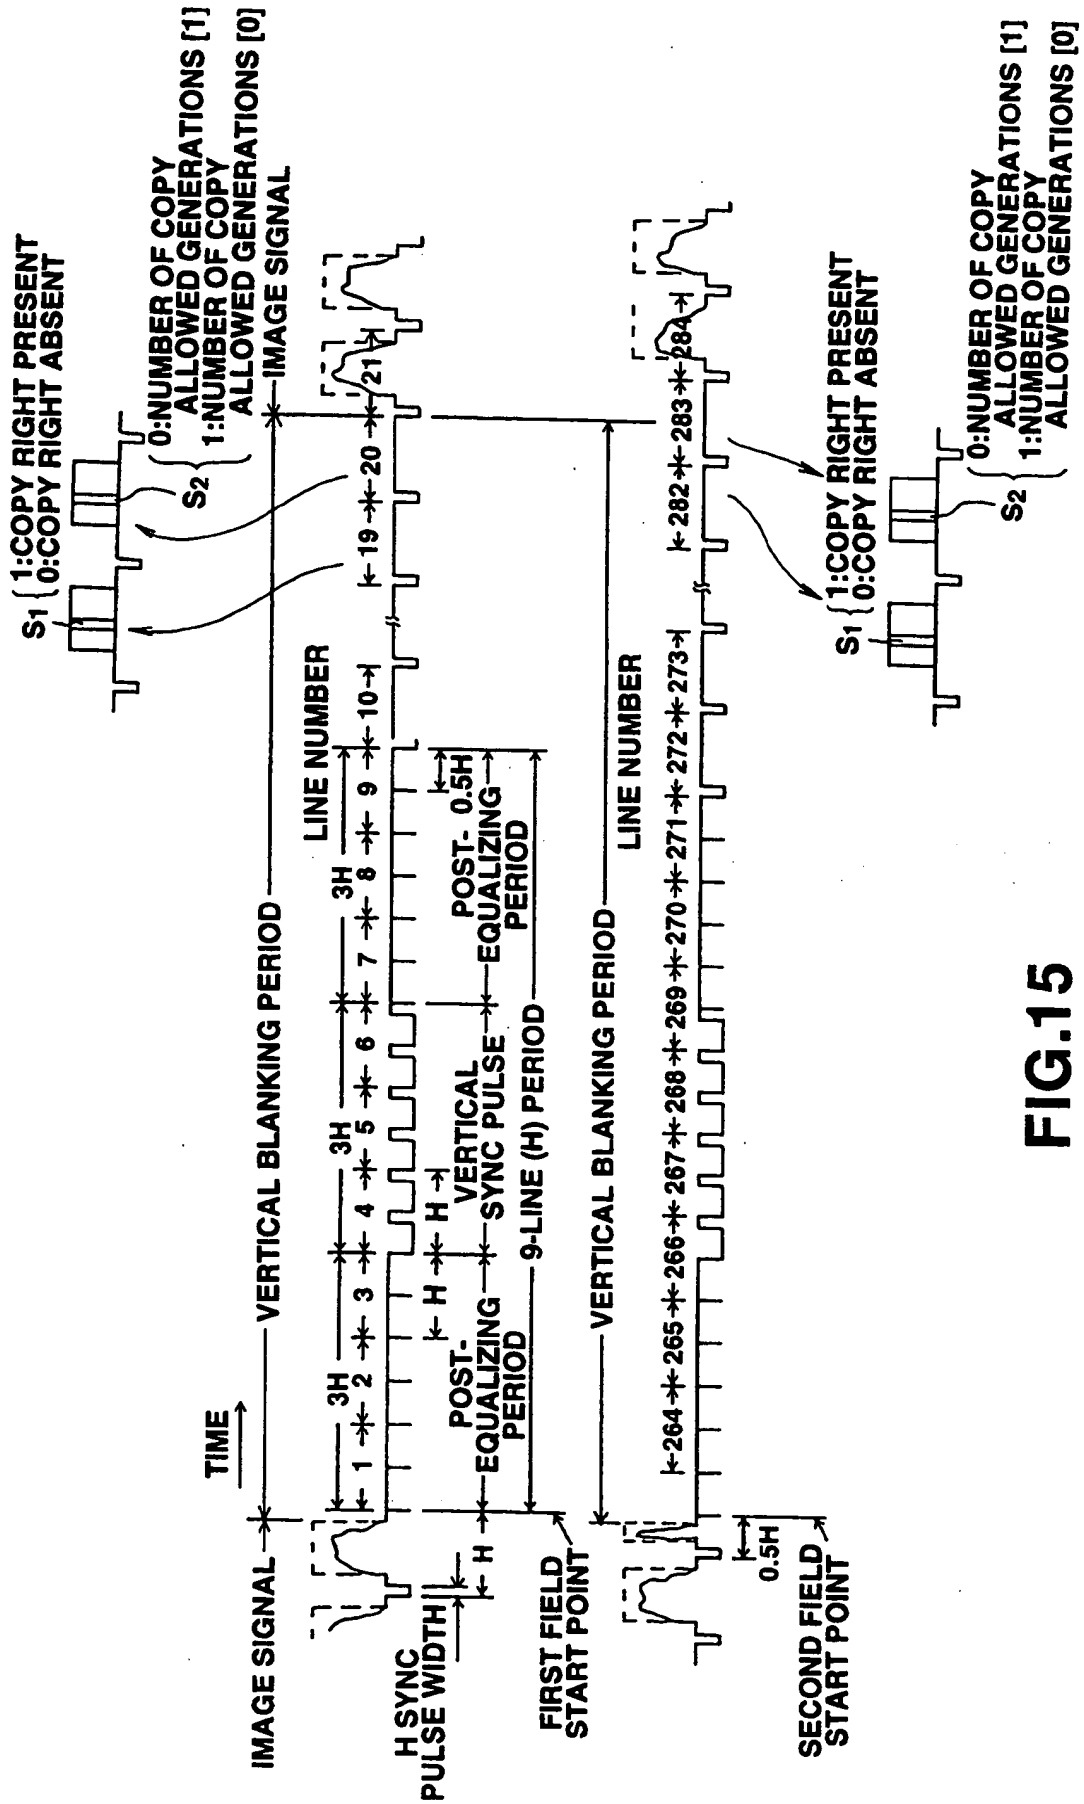


FIG.15

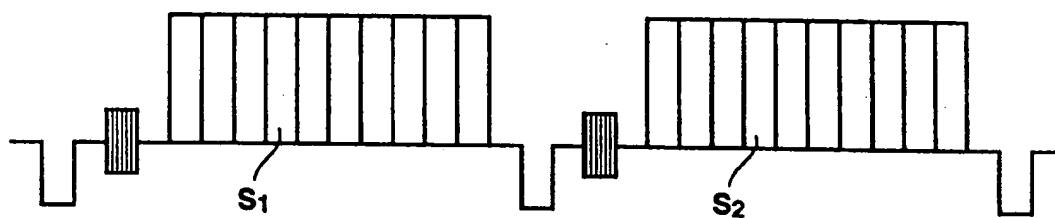


FIG.16

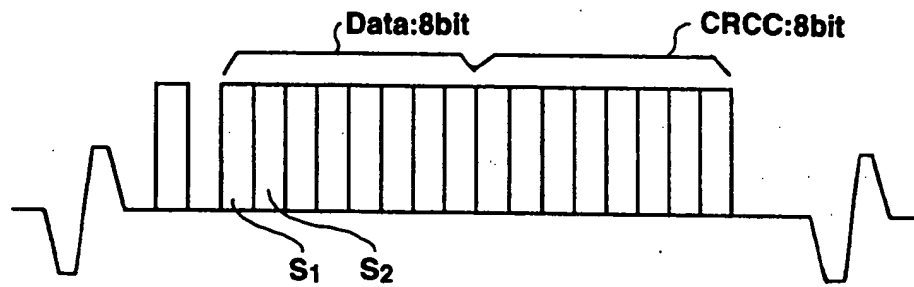


FIG.17

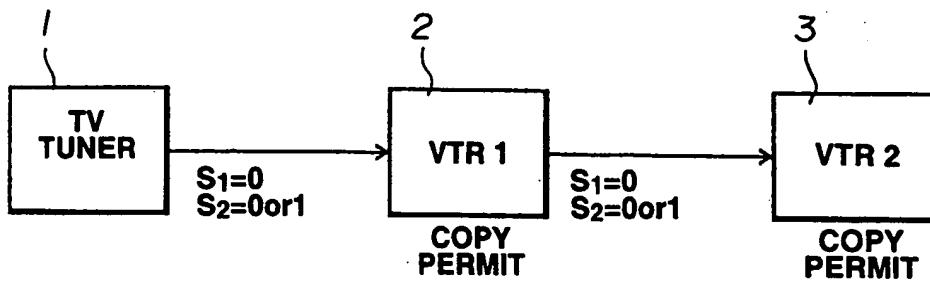


FIG.18

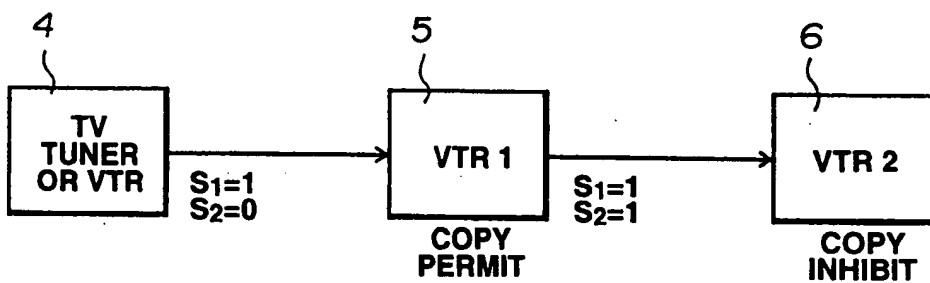


FIG.19

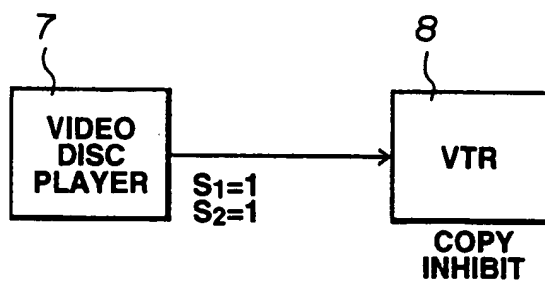
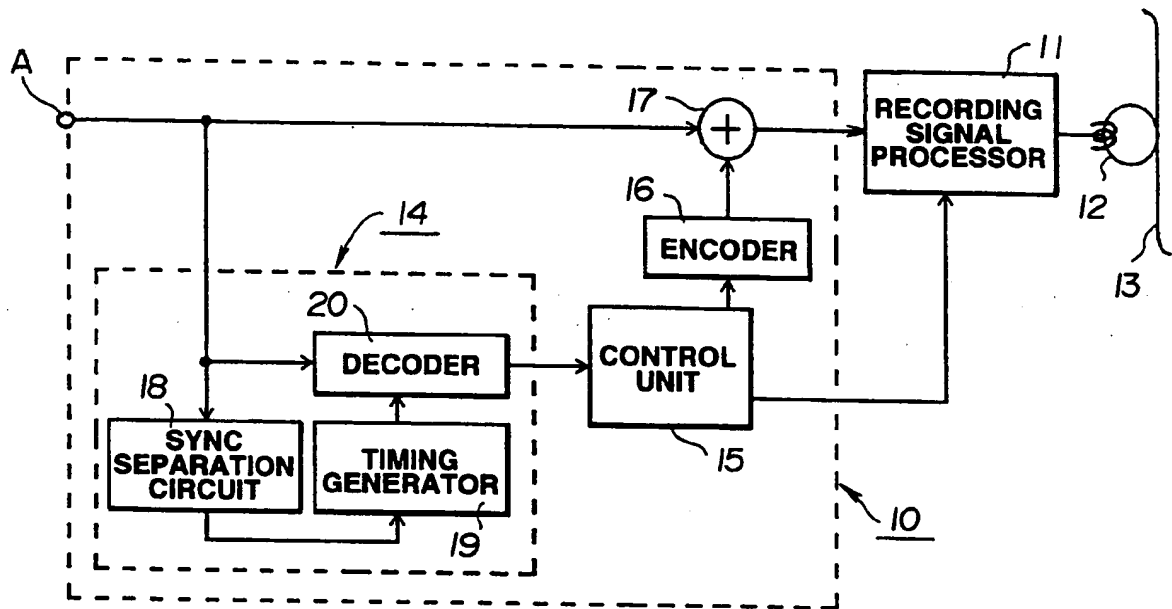
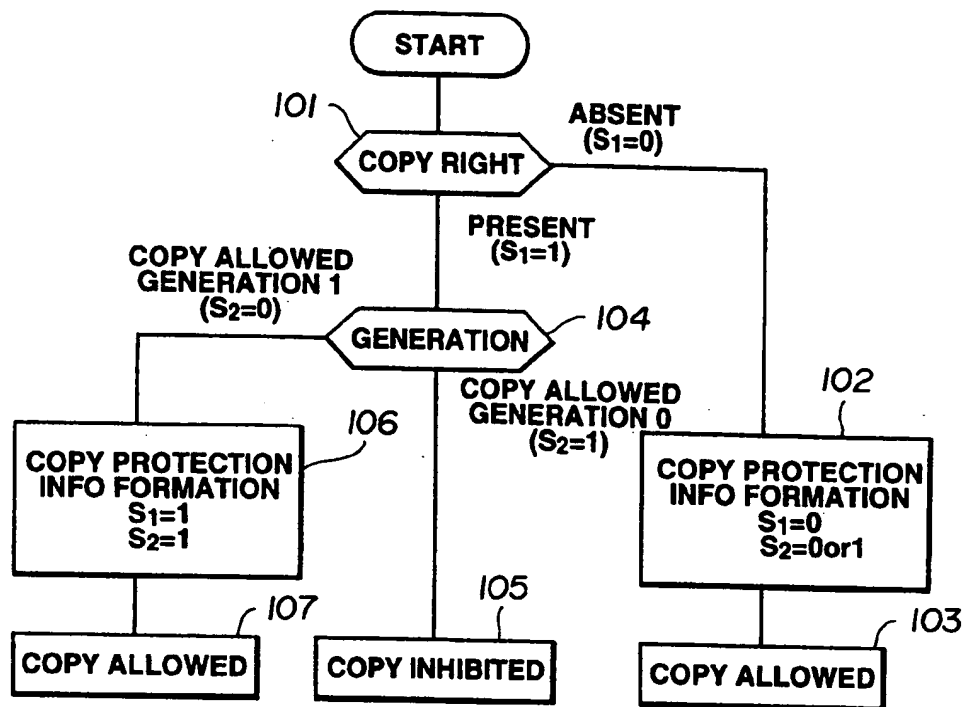


FIG.20

**FIG.21**

**FIG.22**

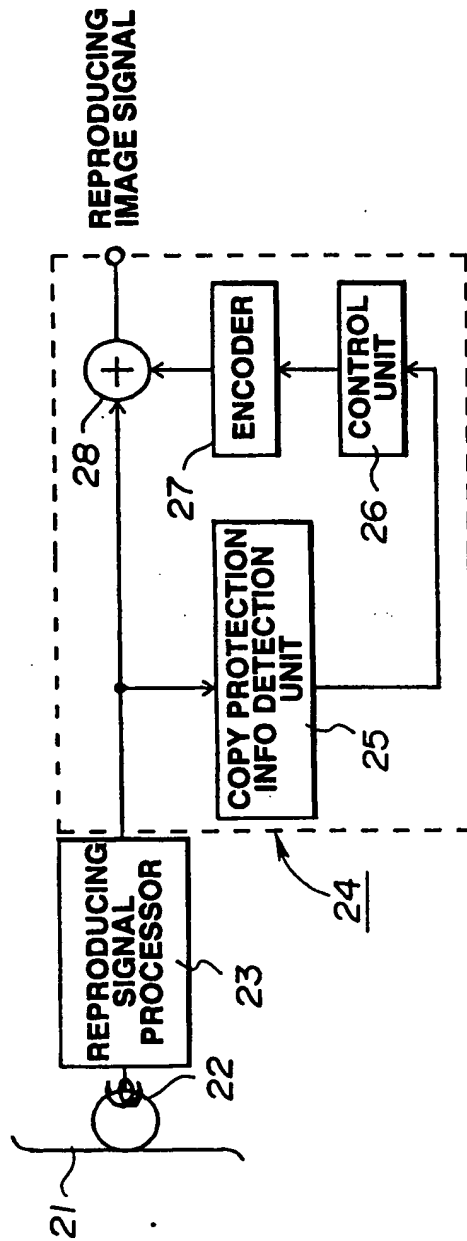
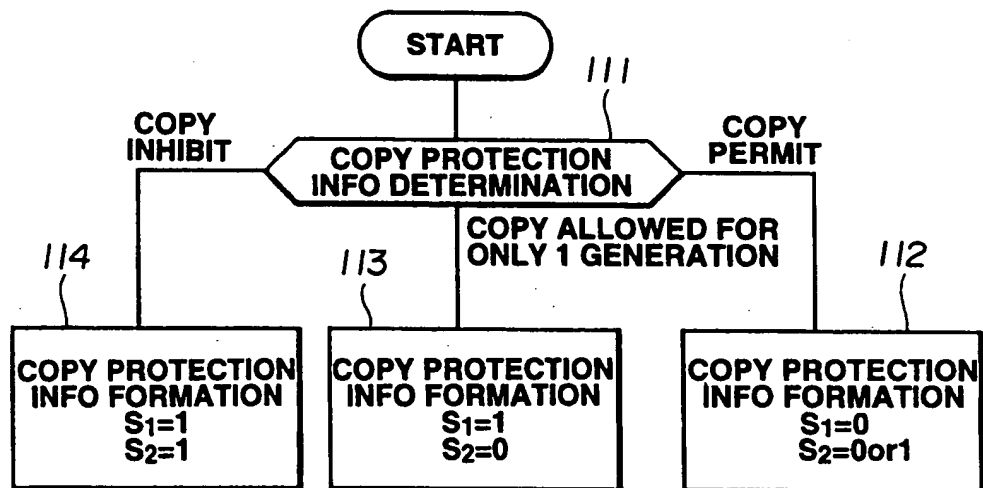


FIG.23

**FIG.24**

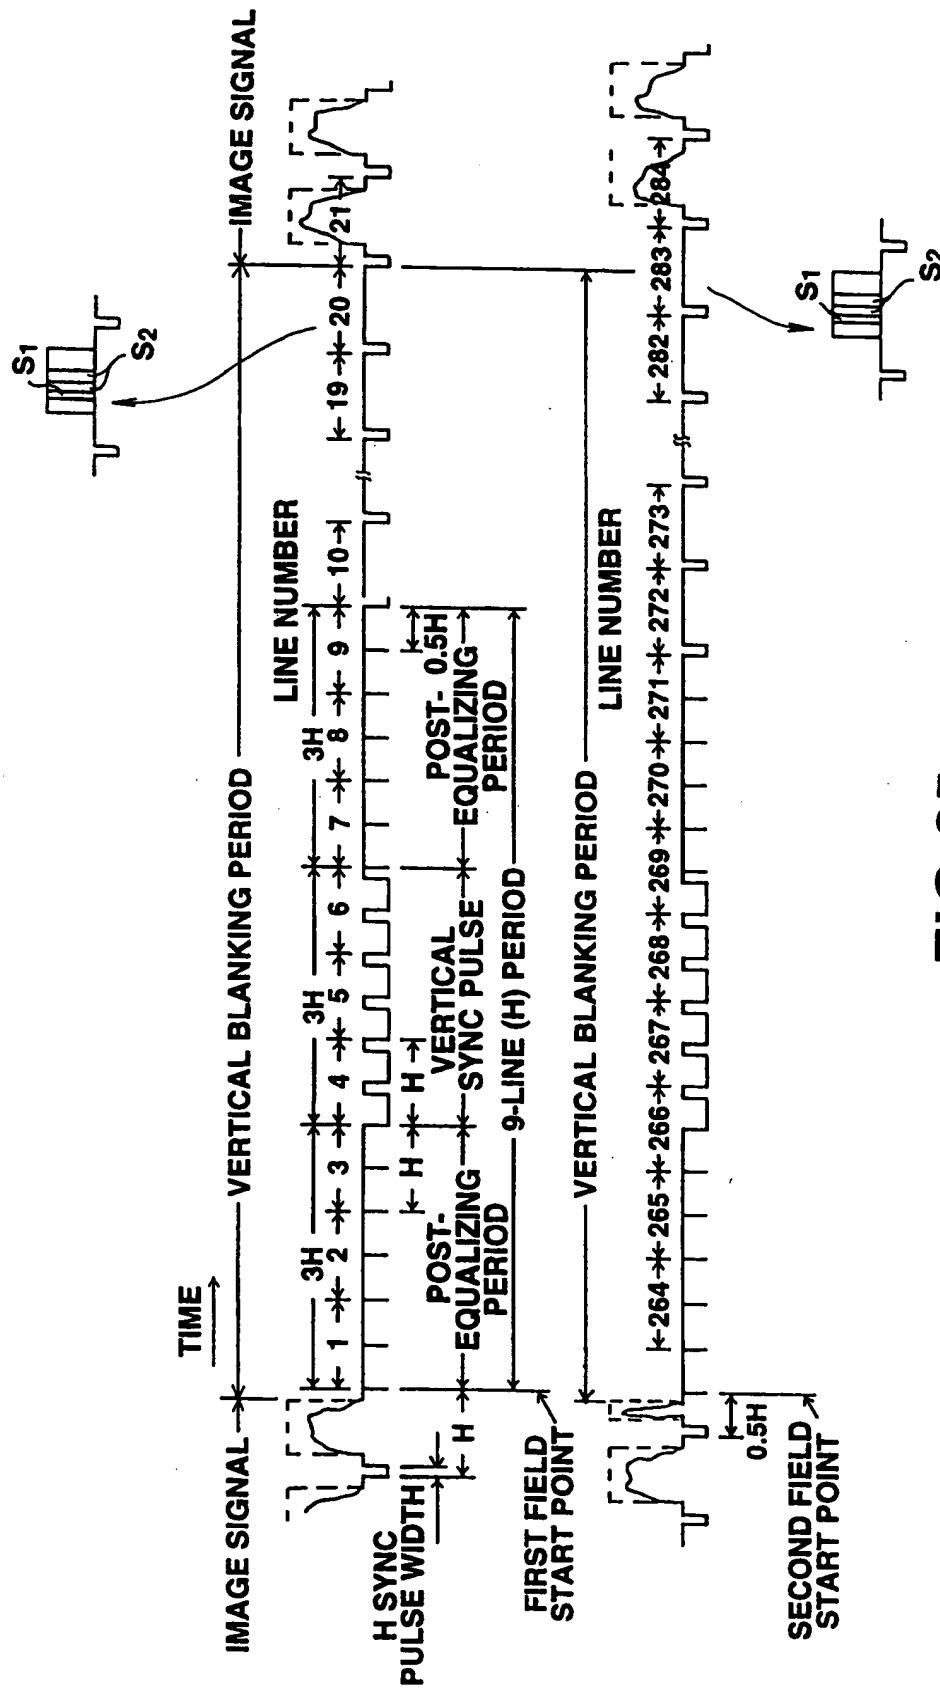


FIG.25

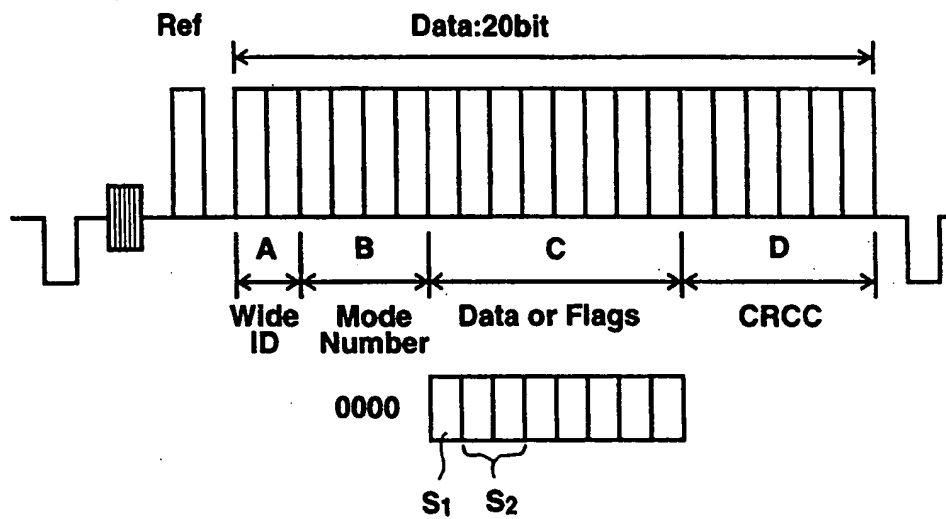


FIG.26

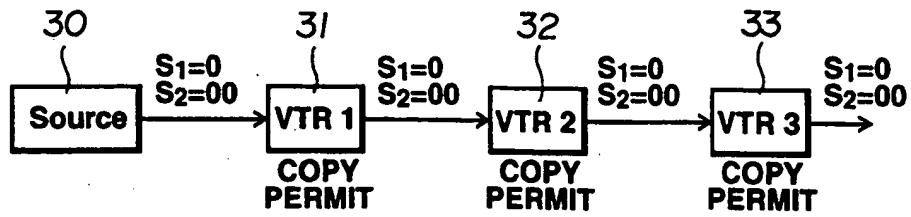


FIG.27

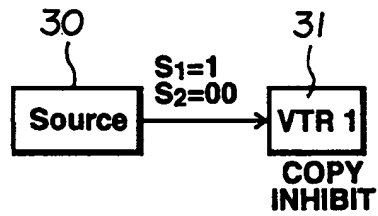


FIG.28

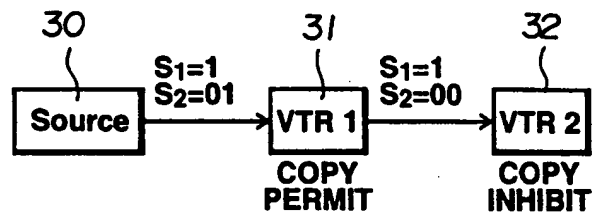


FIG.29

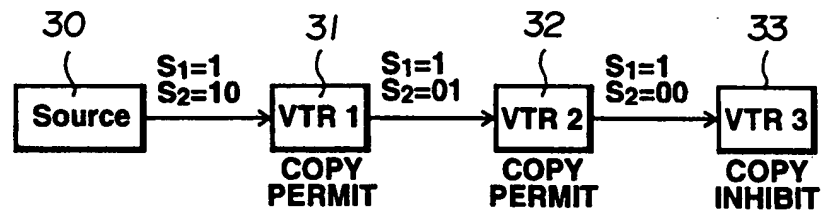


FIG.30

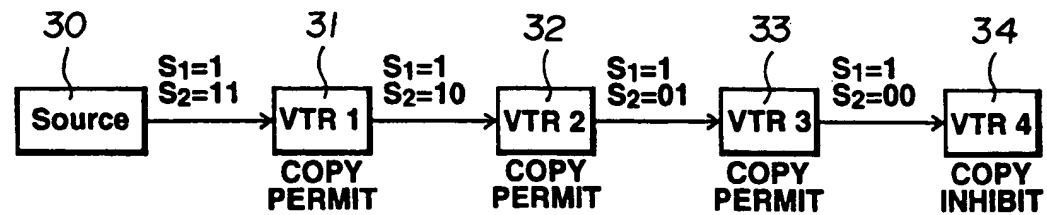


FIG.31



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 30 2331

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|---|--|---|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int. CL.5) |
| X | WO-A-92 16944 (DEUTSCHE THOMSON-BRANDT GMBH) * page 1, line 8 - line 13 * | 1-15, 19, 26 | H04N5/91 H04N5/92 G11B20/00 |
| Y | * page 1, line 33 - page 3, line 14 * * page 4, line 4 - page 5, line 2 * * page 5, line 20 - page 7; figures 1-4 * | 16-18, 20, 21, 23-25 | |
| Y | PATENT ABSTRACTS OF JAPAN vol. 13, no. 355 (P-914) 9 August 1989 & JP-A-01 113 959 (TAKESHI MIZUNUMA) 2 May 1989 * abstract * | 16-18 | |
| Y | GB-A-2 180 111 (VIDEO RESEARCH LIMITED) | 20, 21, 23-25 | |
| A | * page 3, column 1, line 18 - line 28; figures 4, 5 * | 22 | |
| P, X | EP-A-0 574 892 (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.) * page 12, line 19 - page 13, line 17; figures 6, 7 * | 1-15, 19, 26 | TECHNICAL FIELDS SEARCHED (Int. CL.5) H04N G11B |
| A | FERNSEH UND KINO TECHNIK, vol. 47, no. 3, March 1993, BERLIN DE pages 197 - 205 ZANDER 'Harddisk-Recording (Teil III)' * page 198, column 1, line 62 - column 2, line 58; figure 1 * * page 200, column 2, line 16 - column 3, line 43 * | 1-26 | |
| The present search report has been drawn up for all claims | | | |
| Place of search BERLIN | | Date of completion of the search 11 July 1994 | Examiner Materne, A |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>A : member of the same patent family, corresponding document</p> | | | |

EP 0 FORM 1500 (12/92) (P. 0001)